POMONA ELECTRONICS

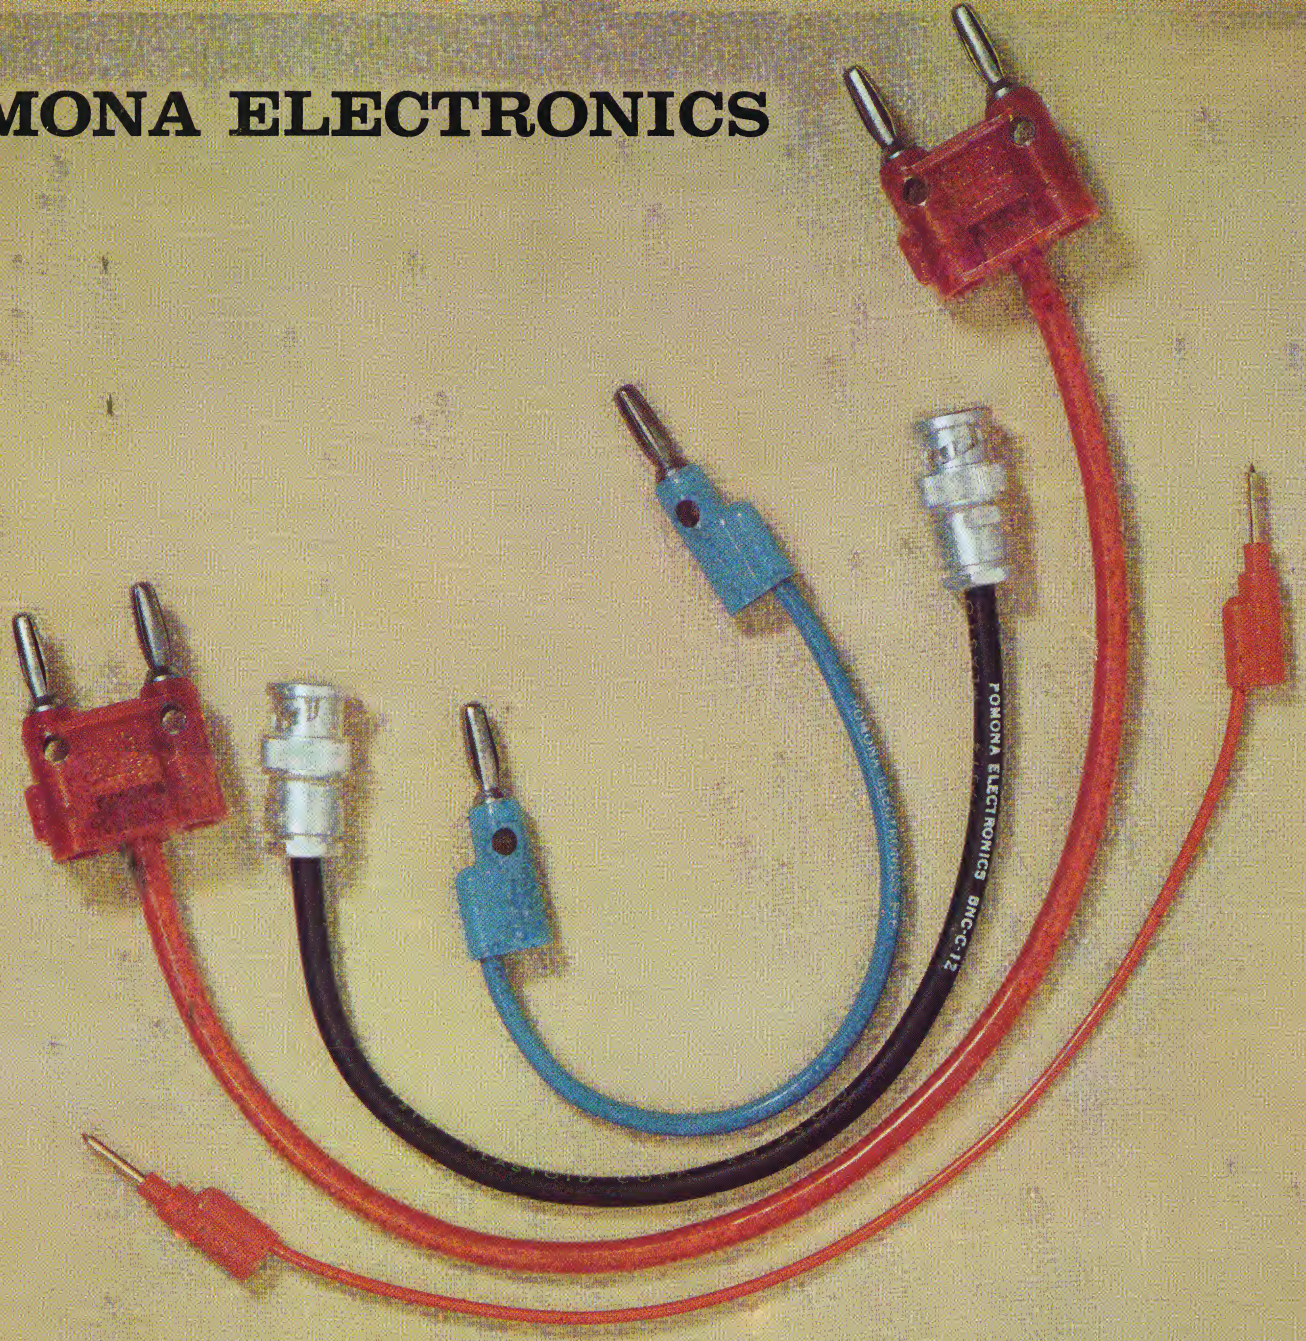

ELECTRONIC TEST ACCESSORIES

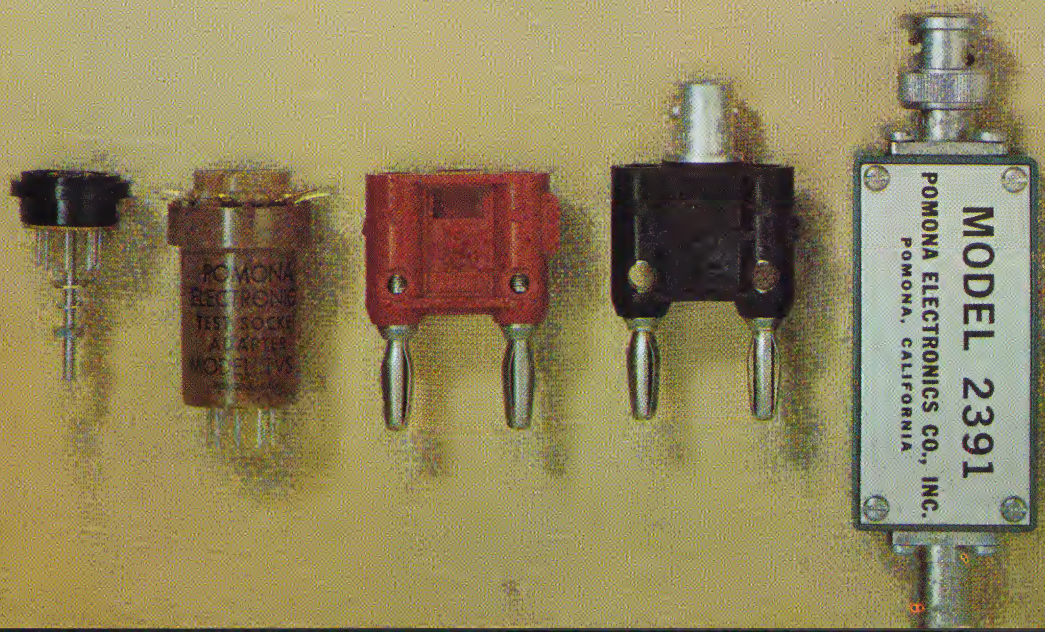

GENERAL CATALOG

II-66

AT POMONA ELECTRONICS...

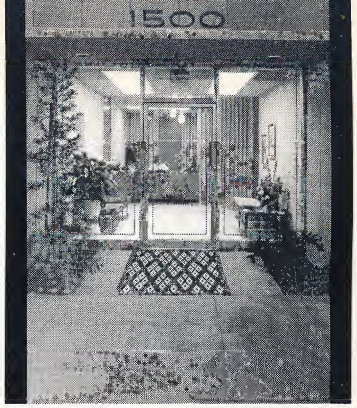

The entrance to Pomona Electronics Company offers a sincere welcome to salesmen and others having a genuine concern in the service and quality of the products manufactured by our organization. Pomona Electronics customers are welcome to visit us any time.

POMONA TEST ACCESSORIES... Designed to Meet Rigid Industrial and Military Applications

POMONA ELECTRONICS' Test Accessories are primed with uses for all manufacturers and laboratories engaged in testing or designing electronic equipment. Specialization in Molded Patch Cords, Cable Assemblies, Test Socket Adapters, ¾" Spaced Molded Accessories, Molded Test Leads and Connecting Leads and other Design Accessories make Pomona Electronics Co., Inc. your best source of Electronic Test Accessories.

Complete engineering facilities are dedicated to a meticulous control of all facets which comprise excellence of product. Every item is the result of choosing the best in materials and planning the processing and assembly to guarantee quality. Adequate supplies are maintained in our stockroom at all times. Our processing and shipping facilities are geared to fast, accurate deliveries to meet your most demanding delivery schedule.

POMONA ELECTRONICS CO. INC.
1500 East Ninth Street • Pomona, California 91769 • Telephone: (714) 623-3463

NEW QUANTITY PRICE DISCOUNT SCHEDULE

For the convenience of our many industrial customers who purchase Pomona products in quantities we offer a new, simplified ordering procedure.

You will find a code letter printed next to the single-item net price of every model listed in the general catalog. This code refers to the particular quantity discount price schedule that applies to each individual item.

To find the quantity discount price for a specific model, simply note the net price, and quantity discount schedule code letter listed for the item in the catalog. Then, referring to the industrial price list, locate the net price in the left-hand column, and the code letter in one of the right-hand columns. This will give you the quantity discount price for that particular item.



DOUBLE BANANA PLUG



Double banana plug on ¾" centers; set screws secure leads; simplifies cable construction or component mounting; banana jacks permit top Stack-Up for multiple connections.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL MDP (Specify Color)

QUANTITY DISC. CODE **A** NET .75

NET PRICES	A 1-24	25-49	50-99	100-249	1-9	10
.15	.15	.14	.13	.11		
.25	.25	.23	.21	.18		
.35	.35	.32	.30	.25		
.50	.50	.45	.43	.35		
.59						
.69						
.75	.75	.68	.64	.53		
.80	.80	.73	.69	.58		
.95	.95	.87	.79	.69		

New 1966 industrial quantity price discount schedule

COPYRIGHT 1966 BY POMONA ELECTRONICS CO. INC.

NO PORTION OF THIS CATALOG MAY BE REPRODUCED WITHOUT EXPRESS, WRITTEN PERMISSION OF POMONA ELECTRONICS.

TABLE OF CONTENTS

PAGE

ADAPTER—¾" Spaced Banana Plugs to:
- Binding Posts 5
- BNC Connector 6
- BNC with Blocking Capacitor 6
- BNC with Matching Pad . . . 6
- Microdot Connector 5
- "N" Connector 7
- Phone Tip Receptacle 5
- TNC Connector 7
- UHF Connector 8

ADAPTER—¾" Spaced Shielded Banana Plugs to:
- BNC Connector 6
- Microdot Connector 5
- "N" Connector 7
- TNC Connector 7
- UHF Connector 8

ADAPTER—¾" Spaced Binding Posts to:
- Banana Plugs 5
- BNC Connector 6
- "N" Connector 7
- Phone Plug 5
- TNC Connector 7
- UHF Connector 8

ADAPTER—¾" Spaced Banana Jacks to:
- Phone Plug 5

ADAPTER—¾" Spaced Shielded Banana Jacks to:
- BNC 6

ADAPTERS
- Cathode Ray Tube 31
- Cathode Ray Tube Conversion 31
- Test Socket Tube 29
- Universal Harness Testing . . 18

ADAPTER—Amp. Program Board 11

ADAPTER—Banana Plug to Tip Jack 9
Miniature Banana Jack 15

PAGE

ADAPTER—Binding Post to UHF Male 8

ADAPTER—Miniature Banana Plug to Banana Jack 15

ADAPTER—Phone Tip to Banana Jack 9

ALLIGATOR CLIP, INSULATED, to:
- Banana Jack 11
- Pin Tip Jack 11

BANANA JACK, ASSEMBLIES
- Miniature 15
- Standard 11

BINDING POST ASSEMBLIES
- ½" Spaced 15

BREADBOARD SOCKETS . . 11, 29

CABLE ASSEMBLIES—Coaxial, with:
- Alligator Clips 27, 28
- BNC Connector . . . 25, 26, 27
- ½" Spaced Double Banana Plugs 14, 15
- ¾" Spaced Double Banana Plugs . . 14, 24, 25, 26, 27, 28
- GR-874 Connector 26, 28
- Kelvin Clip 28
- Minigator Clips 27
- "N" Connector 26, 27, 28
- Pin Tips 26
- PJ-068 26
- Shielded Double Banana Plug 24, 25, 28
- Spade Lugs, Tellurium Copper 21
- Test Probe 19
- TNC Connector 26
- UHF Connector 25, 27

CATHODE RAY TUBE ADAPTERS 31

COMPONENT MOUNTING PLUG Banana ¾" Spaced with:
- Set Screws—Solderless . . . 4
- Solder Terminals 4

PAGE

COMPONENT MOUNTING BOXES—SHIELDED with Coaxial Connectors . 16, 17

COMPONENT MOUNTING BOXES—UNSHIELDED
- with No Connections 12
- with Banana Plugs . . 12, 13, 14
- with Pin Tip Plugs 14
- with Coaxial Connectors . . . 12

CONNECTING LEADS, with:
- Alligator Clips 18, 20
- Banana Plugs . . 18, 20, 22, 23
- Miniature Banana Plugs . . . 14
- Minigator Clips 20
- Phone Tips 20, 23
- Spade Lugs, Brass 20
- Spade Lugs, Tellurium Copper 21
- Test Probes 19

ISOLATION PLUG, with:
- BNC Connector 10
- Double Banana Plug 10
- Single Banana Plug 10
- Single Phone Tip Plug . . . 10

JACK, BANANA—STANDARD
- Single 15
- Double 15

JACK, BANANA—MINIATURE
- Single 15
- Double 15

JUMPERS, (see Connecting Leads)

PATCH CORDS, (see Connecting Leads) (see Cable Assemblies)

PLUGS, Banana—½" Spaced Banana Plugs with:
- Set Screws—Solderless . . . 15
- Solder Terminals 15

PAGE

PLUGS, Banana—¾" Spaced Banana Plugs with:
- Set Screws—Solderless . . . 4
- Solder Terminals 4
- Shield 8
- Shielded Balanced Line . . . 8

PLUGS, PHONE TIPS—¾" Spaced with:
- Set Screws—Solderless . . . 9
- Solder Terminals 9

PLUG, BANANA with:
- Set Screw—Solderless 9

RESISTORS—Molded with ½" Spaced Banana Plugs 15

RESISTORS—Molded, with ¾" Spaced Banana Plugs 5

SHORTING BAR—with ½" Spaced Banana Plugs 15

SHORTING BAR—with ¾" Spaced Banana Plugs 5

SHORTING BAR—with ¾" Spaced Phone Tips 9

SOCKETS, BREADBOARD . . . 29

SOCKET SAVERS 30

SPADE LUG 11

SPLICE—Single Banana Plug 9

TEST LEAD HOLDER 18

TEST PROBES 18, 19

TEST SOCKET CATHODE RAY TUBE ADAPTERS 31

TEST SOCKET TUBE ADAPTERS 29

TRANSISTOR SOCKET ADAPTER AND ACCESSORIES 11

UNIVERSAL HARNESS TESTING ADAPTER 18

ALPHABETICAL-NUMERICAL INDEX

MODEL	PAGE
AL-B	20
AL-B-BNC	27
AL-B-UHF	27
AL-C-BNC	27
AL-C-UHF	27
B	22
BNC-B	25
BNC-C	25
HB	22
MDP	4
MDP-R	5
MDP-S	5
MDP-ST	4
MDP-X	10
MG-B	20
MG-B-BNC	27
MG-B-UHF	27
MG-C-BNC	27
MG-C-UHF	27
P	23
PM-080	23
PT-063	23
PT-080	23
SS-7	30
SS-8	30
SS-9	30
SS-11	30
SS-12	30
SS-789	30
TS-187	11
TS-187R	11
TVS-1	31
TVS-2	31
TVS-3	31
TVS-4	31
TVS-7	29
TVS-8	29
TVS-9	29
TVS-12	29
TVS-789	29
UHF-B	27
UHF-C	27
XS-7	29
XS-8	29
XS-9	29
XS-T4	11
2BA	24
2BA-AL	27
2BA-MG	27
2BB	24
2BB-AL	27
2BB-BNC	25
2BB-MG	27
2BB-UHF	27
2BC	24
2BC-AL	27
2BC-BNC	25
2BC-MG	27
2BC-PP	26
2BC-UHF	27
110-E	31
110-G	31
110-P	31
110-R	31
110-RS	31
110-S	31
110-SYR	31
1081	14
1126	23
1152-C	*NEW* 28
1155-B	25
1155-C	25
1167	24
1236	20
1269	6
1270	6
1275	5
1276	5
1277	5
1279	5
1285	5
1286	5
1296	6
1325	9
1330	4
1330-ST	4
1340	7
1366-C	26
1367-B	25
1367-C	25
1368	24
1383-B	25
1383-C	25
1390	10
1432	9
1433	8
1437	11
1440	22
1447	29
1449	29
1452	6
1468	10
1469	10
1472	11
1508	*NEW* 18
1550-B	24
1550-C	24
1555-B	25
1555-C	25
1556-B	28
1556-C	28
1569-B	19
1575	5
1581	11
1589	19
1613	20
1614	11
1645	6
1656	6
1658-S	28
1681	6
1693	21
1698	8
1699	8
1703-C	26
1705	19
1707	8
1708	8
1710	29
1727	23
1730	9
1737	18
1738	18
1739	18
1740	7
1743	20
1748	18
1751	30
1756	21
1770	7
1779	29
1791	8
1792	8
1796	7
1808-C	26
1809	9
1823	9
1825	9
1829	9
1837	10
1845	5
1847	30
1848	30
1849	30
1855	5
1858	9
1868	6
1894	18
1904	9
1910	10
1921	8
1922	9
1944-C	26
1959	18
1960	20
1975	7
1976	7
1977	11
1980	5
1981	7
1982	7
1983	7
1985	22
1986	19
1987	20
1988	19
1989	20
1990	23
1991	11
1992	7
2035	15
2095	13
2096	12
2097	13
2098	12
2099	13
2100	13
2101	13
2102	13
2103	12
2104	12
2105	12
2138	*NEW* 15
2142	15
2143	15
2174	26
2184-A	26
2204-C	28
2223-C	26
2224	12
Replaces 1224	
2239-R	28
2240	11
2241-C	26
2243-C	26
2244	15
2245	15
2246	15
2247-K	14
2248-K	14
2249-C	25
2259	*NEW* 14
2260	*NEW* 14
2262	*NEW* 14
2268	*NEW* 14
2269	*NEW* 11
2276	*NEW* 31
2316-C	*NEW* 28
2380	*NEW* 31
2382	*NEW* 15
2383	*NEW* 15
2390	*NEW* 16
2391	*NEW* 16
2392	*NEW* 16
2393	*NEW* 16
2395	*NEW* 16
2396	*NEW* 16
2397	*NEW* 16
2410	*NEW* 17
2411	*NEW* 17
2412	*NEW* 17
2413	*NEW* 17
2415	*NEW* 17
2416	*NEW* 17
2417	*NEW* 17
2438-C	*NEW* 28
2439	*NEW* 15
2440	*NEW* 15
2443-K	*NEW* 14
2476-J	*NEW* 28
2477	*NEW* 15
2484	*NEW* 18

POMONA ELECTRONICS

¾" SPACED MOLDED DOUBLE BANANA PLUGS

Pomona Banana Plug and stack-up accessories are of the highest quality—tough thermoplastic—molded directly on to the metal body of plugs and connectors for maximum strength, moisture resistance and insulative properties:

General Specifications listed below apply to items using banana plugs in this catalog.

ACTUAL SIZE

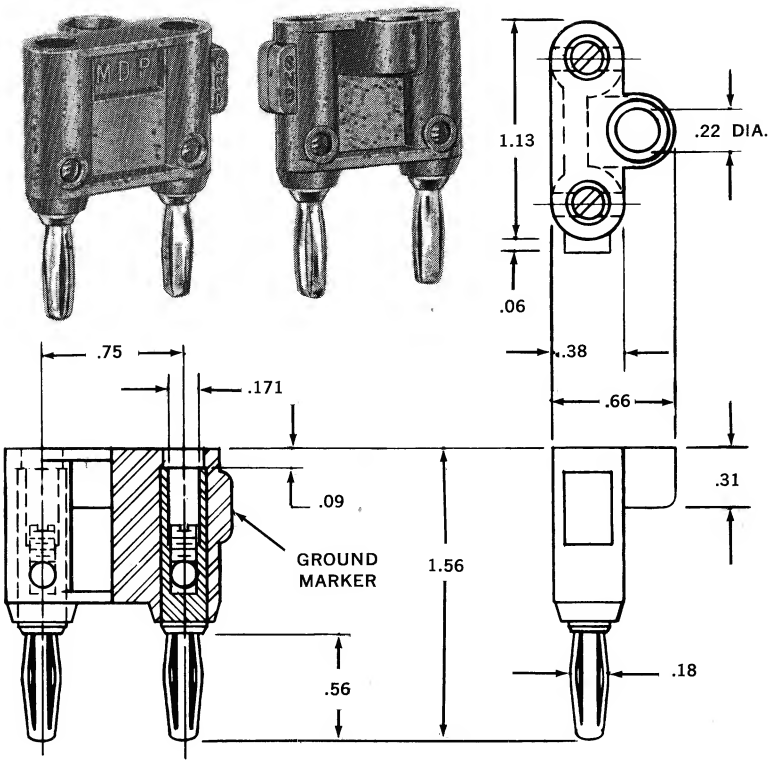

FEATURES . . .

- One piece beryllium copper heat treated spring for maximum long life.
- Rounded spring design results in maximum contact area.
- STACK-UP feature allows an unlimited number of connections at the same electrical point.

SPECIFICATIONS . . .

- Fits standard 0.166 dia. banana jacks.
- Spring, beryllium copper alloy 25 per QQ-C-533.
- Plug body, Brass per QQ-B-626 Comp. 22.
- Nickel plated per QQ-N-290, Class 2.
- Contact resistance less than 0.001 ohms per banana plug

RATINGS	Models: MDP; MDP-ST; 1330; 1330-ST
Capacity :	0.8 pf to 10 MC
Current :	15 Amps. Cont., 30 Amps. Int.
Voltage :	5000 W.V. D.C.
Temperature :	−25°C to +85°C, operating temp.

DOUBLE BANANA PLUG





Double banana plug on ¾" centers; set screws secure leads; simplifies cable construction or component mounting; banana jacks permit top Stack-Up for multiple connections.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL MDP (Specify Color) QUANTITY DISC. CODE **A** **NET .75**

COMPONENT MOUNTING DOUBLE BANANA PLUG





Double banana plug on ¾" centers; set screws secure leads; features recess for mounting small components; banana jacks permit top Stack-Up for multiple connections.

COLORS: Black, Red

MODEL 1330 (Specify Color) QUANTITY DISC. CODE **A** **NET .75**

DOUBLE BANANA PLUG WITH SOLDER TURRET TERMINALS





Similar to Model MDP, except has solder turret terminals for permanent noise-free connections of cables and components. Double banana plug on ¾" centers; banana jacks permit top Stack-Up for multiple connections.

COLOR: Black

MODEL MDP-ST QUANTITY DISC. CODE **A** **NET .85**

COMPONENT PLUG WITH SOLDER TURRET TERMINALS





Similar to Model 1330, except has solder turret terminals for permanent noise-free connections of components, etc. Double banana plug on ¾" centers: Banana jacks permit top Stack-Up for multiple connections.

COLORS: Black, Red.

QUANTITY DISC. CODE **A**

MODEL 1330-ST (Specify Color) **NET .85**

BINDING POSTS TO DOUBLE BANANA PLUG



Features insulated binding posts on ¾" centers for rapid mounting and interchangeability of components. Binding posts allow top Stack-Up for multiple connections. Side Stack-Up provided by thru-holes in plug body.



UPPER: Insulated double binding posts, on ¾" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
LOWER: Double banana plug, on ¾" centers.
COLORS: Body, Black. Binding Posts, Black/Red.

MODEL 1286 QUANTITY DISC. CODE **A** **NET 2.50**

INSULATED SHORTING BAR





Ideal as a connecting link for use with ¾" spaced banana jacks. Banana plugs internally solder-bonded with #14 AWG wire. Banana jacks provide top Stack-Up. Cross holes (.166 dia.) in body provide side Stack-Up connections. Resistance less than 1.5 milliohms installed. Current rating 15 Amps. Cont., 30 Amps. Int. "Shorting Bar" marked on top of plug.
COLORS: Natural, Black, Red.

MODEL MDP-S (Specify Color) QUANTITY DISC. CODE **A** **NET .95**

METAL SHORTING BAR



Low profile, nickel plated brass shorting bar. Double banana plugs on ¾" centers swaged to 3/32" thick brass bar. Resistance, less than 1.5 milliohms installed. Current rating: 15 Amps. Cont., 30 Amps. Int.

MODEL 1855 QUANTITY DISC. CODE **A** **NET .75**

MOLDED PRECISION RESISTOR





Ideal where rapid interchange of resistance values is required. Used in breadboarding, R & D labs., Standards, Terminations, etc. Deposited carbon 1% resistor, ½ watt, molded internally. Resistor soldered to double banana plug, on ¾" centers. Top Stack-Up provided for multiple connections. Cross holes (.166 dia.) in body provide side Stack-Up connections. Resistance value stamped on top of plug.

(OHMS)					
	50	200	1K	100K	1 Meg.
	75	250	5K	200K	2 Meg.
	120	500	10K	250K	5 Meg.
	130	600	20K	500K	10 Meg.
	150	900	50K		

MODEL MDP-R (Specify Value) QUANTITY DISC. CODE **A** **NET 2.75**

ADAPTER — .080 TIP JACKS TO DOUBLE BANANA PLUG





Permits .080 Tip plugs to be used with equipment having banana jacks.
UPPER: Tip jacks, beryllium copper, gold flashed; spaced on ¾" centers to accept .080 dia. pin tip plugs.
LOWER: Double banana plug, on ¾" centers, nickel plated. Cross holes (.166 dia.) in body provide side Stack-Up connections.
COLOR: Black.

MODEL 1845 QUANTITY DISC. CODE **A** **NET .85**

ADAPTER — BINDING POSTS TO PHONE PLUG



Permits single or double banana plug to be used with equipment having phone jacks. Ideal for rapid mounting of components and test leads.
UPPER: Insulated binding posts, on ¾" centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.
LOWER: ¼" dia. phone plug, 1-3/16" long.
COLOR: Body, Black. Binding Posts: Black/Red.

MODEL 1285 NET 4.85 QUANTITY DISC. CODE **A**

ADAPTER — BANANA JACKS TO PHONE PLUG





Permits single or double banana plugs to be used with equipment having phone jacks.
UPPER: Double banana jack, on ¾" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
LOWER: Standard ¼" dia. phone plug, 1-3/16" long.
COLOR: Black.

MODEL 1980 NET 2.85 QUANTITY DISC. CODE **A**

ADAPTER — MICRODOT RECEPTACLE TO DOUBLE BANANA PLUG





Permits Microdot miniature coaxial plug to be used with equipment having banana jacks. Cross holes in body provide side Stack-Up connections.
UPPER: Microdot receptacle, Screw-On Type.
LOWER: Double banana plug, on ¾" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.

MODEL	Type	(Ohms)	Body Color	Receptacle Thread	NET	QUANTITY DISC. CODE
1275		50	Green	10-32	6.85	A
1277		70	Violet	12-32	6.85	
1279		93	White	¼-32	6.85	

ADAPTER — MICRODOT RECEPTACLE TO DOUBLE BANANA PLUG





Permits Microdot miniature coaxial plug to be used with equipment having banana jacks. Cross holes in body provide side Stack-Up connections.
UPPER: Microdot Receptacle, Slide-On Type. Universally adapts to 50, 70 or 93 ohm type plug.
LOWER: Double banana plug, on ¾" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
COLOR: Black.

MODEL 1276 QUANTITY DISC. CODE **A** **NET 7.85**

ADAPTER—MICRODOT RECEPTACLE TO SHIELDED BANANA PLUGS

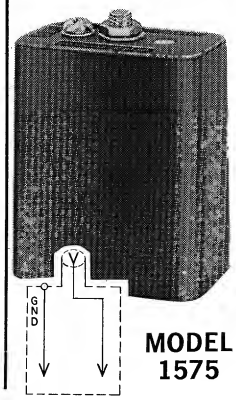

Permits Microdot miniature coaxial plug, 50 ohm, to be used with equipment having banana jack binding posts. Black anodized aluminum shield reduces noise pick-up more than 70 DB. Ideal for noise reduction in low level acceleration systems.



UPPER: Microdot Receptacle, Screw-On Type, Receptacle Thread 10-32.
LOWER: Shielded Double banana plug, on ¾" centers.
COLOR: Black.

MODEL 1575 QUANTITY DISC. CODE **A** **NET 6.85**

BNC ADAPTERS



ADAPTER — BNC RECEPTACLE TO DOUBLE BANANA PLUG



Permits BNC plug to be used with equipment having banana jacks. Excellent for adapting laboratory VTVM, oscilloscopes and signal generator inputs to readily available coaxial cables.
UPPER: BNC receptacle.
LOWER: Double banana plug, on ¾″ centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
COLOR: Black.

MODEL 1269 QUANTITY DISC. CODE **A** **NET 2.85**



ADAPTER — BNC PLUG TO DOUBLE BANANA PLUG



Permits BNC receptacle to be used with equipment having banana jacks. Minimizes number of coaxial connections for maximum efficiency.
UPPER: BNC plug.
LOWER: Double banana plug, on ¾″ centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
COLOR: Black.

MODEL 1270 QUANTITY DISC. CODE **A** **NET 3.85**



ADAPTER — BINDING POSTS TO BNC PLUG



Permits single or double banana plugs to be used with equipment having BNC receptacle. Excellent for use with laboratory oscilloscopes.
UPPER: Insulated binding posts, on ¾″ centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.
LOWER: BNC plug.
COLOR: Body, Black. Binding Posts: Black/Red.

MODEL 1296 QUANTITY DISC. CODE **A** **NET 4.85**



ADAPTER — BINDING POSTS TO BNC RECEPTACLE



Permits single or double banana plugs to be used with equipment having BNC plug.
UPPER: Insulated binding posts, on ¾″ centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.
LOWER: BNC receptacle.
COLOR: Body, Black. Binding Posts: Black/Red.

MODEL 1452 QUANTITY DISC. CODE **A** **NET 4.85**

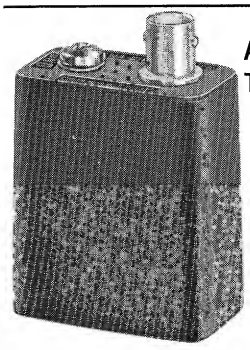

ADAPTER — BNC RECEPTACLE TO SHIELDED BANANA PLUGS

Permits BNC plug to be used with equipment having banana jack binding posts. Black anodized aluminum shield reduces noise Pick-up more than 70 DB. Ideal for low level inputs to oscilloscopes, wave analyzers, etc.



UPPER: BNC receptacle.
LOWER: Shielded double banana plug, on ¾″ centers.

QUANTITY DISC. CODE **A**

MODEL 1645 **NET 3.45**

Now! Increase the flexibility of your laboratory with the use of POMONA molded test accessories.

Minimize the necessity of stocking a large quantity and variety of coaxial cables by using POMONA molded adapters.

Tough thermo-plastic material molded to plug body or connectors insures maximum strength, moisture resistance and excellent insulative properties.

POMONA ELECTRONICS adapters are designed and engineered with you in mind, from the selection of the best in materials, incorporated with a quality control program that enables us to offer to you, products that are unequalled in reliability and quality.

Complete engineering facilities are offered to our customers for special adapter problems that may arise.







ADAPTER — SIGNAL ISOLATOR — BNC RECEPTACLE TO DOUBLE BANANA PLUG

Permits BNC male connector to be used with equipment having banana jacks. General purpose ceramic capacitor molded internally. Rated @ .01 mfd ±20%, 200 WVDC. Insulation resistance 10,000 megohms min. Ideal for isolating DC signals from VTVM inputs and signal generator outputs.



UPPER: BNC receptacle.
LOWER: Double banana plug, on ¾″ centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
COLOR: Blue.

MODEL 1868 QUANTITY DISC. CODE **A** **NET 7.85**



ADAPTER — BNC MATCHING PAD



Adapts 600 OHM sources to 50, 75 or 93 OHM cables. Excellent for matching signal generators and VTVM's to standard coaxial cables. Ideal for receiver alignment. Molded in deposited carbon resistors 1%, ¼W.
UPPER: BNC receptacle.
LOWER: Double banana plug, on ¾″ centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.

MODEL	COLOR	RANGE — OHMS	NET	QUANTITY DISC. CODE
1656-1	Yellow	600 to 50	10.85	A
1656-2	Red	600 to 75	10.85	
1656-3	White	600 to 93	10.85	

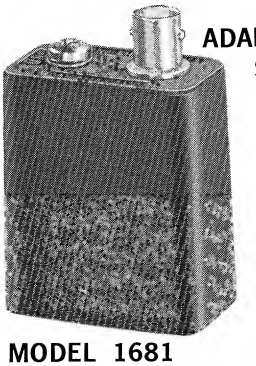

ADAPTER — BNC RECEPTACLE TO SHIELDED BANANA JACKS

Permits BNC plug to be used with equipment having banana plugs. Black anodized aluminum shield reduces noise pick-up more than 70 DB. Ideal for low level inputs to oscilloscopes, wave analyzers, etc.



UPPER: BNC receptacle.
LOWER: Shielded double banana jacks, on ¾″ centers.
COLOR: Black.

MODEL 1681 QUANTITY DISC. CODE **A** **NET 3.45**



ADAPTER — TNC RECEPTACLE TO DOUBLE BANANA PLUG



Permits TNC plug to be used with equipment having banana jacks. Perfect for connecting modern control systems to laboratory test equipment.
UPPER: TNC receptacle.
LOWER: Double banana plug, on ¾" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
COLOR: Black.

MODEL 1340 QUANTITY DISC. CODE **A** **NET 5.85**



ADAPTER — TNC PLUG TO DOUBLE BANANA PLUG



Permits TNC receptacle to be used with equipment having banana jacks. Minimizes your stock of coaxial cables.
UPPER: TNC plug.
LOWER: Double banana plug, on ¾" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
COLOR: Black.

MODEL 1981 QUANTITY DISC. CODE **A** **NET 6.85**



ADAPTER — BINDING POSTS TO TNC PLUG



Permits single or double banana plugs to be used with equipment having a TNC receptacle. Exceptional for signal insertion with rapid interchangeability of terminations.
UPPER: Insulated binding posts, on ¾" centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.
LOWER: TNC plug.
COLOR: Body, Black. Binding Posts: Black/Red.

MODEL 1982 QUANTITY DISC. CODE **A** **NET 6.85**



ADAPTER — BINDING POSTS TO TNC RECEPTACLE



Permits single or double banana plugs to be used with equipment having TNC plug. Useful for rapid interconnection of systems and components.
UPPER: Insulated binding posts, on ¾" centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.
LOWER: TNC receptacle.
COLOR: Body, Black. Binding Posts: Black/Red.

MODEL 1976 QUANTITY DISC. CODE **A** **NET 5.85**

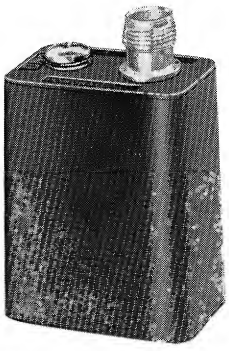

ADAPTER — TNC RECEPTACLE TO SHIELDED BANANA PLUGS

Permits TNC plug to be used with equipment having banana jack binding posts. Black anodized aluminum shield reduces noise pick-up more than 70 DB.
UPPER: TNC receptacle.
LOWER: Double banana plug, on ¾" centers.
COLOR: Black.



QUANTITY DISC. CODE **A**
NET 4.85

MODEL 1975



ADAPTER — TYPE "N" RECEPTACLE TO DOUBLE BANANA PLUG



Permits Type "N" plug to be used with equipment having banana jacks. Ideal for connecting R.F. equipment to conventional test equipment.
UPPER: Type "N" receptacle.
LOWER: Double banana plug, on ¾" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
COLOR: Black.

MODEL 1740 QUANTITY DISC. CODE **A** **NET 5.85**

ADAPTER — TYPE "N" PLUG TO DOUBLE BANANA PLUG



Permits type "N" receptacle to be used with equipment having banana jacks.
UPPER: Type "N" plug.
LOWER: Double banana plug, on ¾" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
COLOR: Black.

MODEL 1770 QUANTITY DISC. CODE **A** **NET 5.85**



ADAPTER — BINDING POSTS TO TYPE "N" PLUG



Permits single or double banana plugs to be used with equipment having Type "N" receptacle. Binding posts allow component insertion.
UPPER: Insulated binding posts, on ¾" centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.
LOWER: Type "N" plug.
COLOR: Black. Binding Posts: Black/Red.

MODEL 1796 QUANTITY DISC. CODE **A** **NET 5.85**



ADAPTER — BINDING POSTS TO TYPE "N" RECEPTACLE



Permits single or double banana plugs to be used with equipment having type "N" plug. Useful for rapid interconnection of systems and components.
UPPER: Insulated binding posts, on ¾" centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.
LOWER: Type "N" receptacle.
COLOR: Body, Black. Binding Posts: Black/Red.

MODEL 1992 QUANTITY DISC. CODE **A** **NET 5.85**

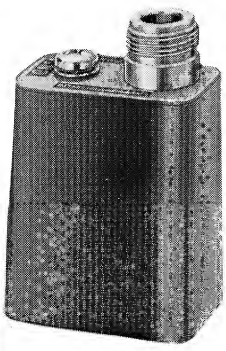

ADAPTER — TYPE "N" RECEPTACLE TO SHIELDED BANANA PLUGS

Permits type "N" plug to be used with equipment having banana jack binding posts. Black Anodized aluminum shield reduces noise pick-up more than 70 DB.
UPPER: Type "N" receptacle.
LOWER: Double banana plug, on ¾" centers.
COLOR: Black.



QUANTITY DISC. CODE **A** **NET 4.85**

MODEL 1983

SHIELDED BANANA PLUGS UHF ADAPTERS



SHIELDED DOUBLE BANANA PLUG IN-LINE CABLE ENTRY



RATED: 15A CONTINUOUS
1200 WVDC
3400 VDC BREAKDOWN
2.5 PF @ 1 MC



- Shielded double plug ¾″ spaced
- Die cast aluminum shell, black anodized
- Noise pick-up reduced 70 DB
- Gold flashed solder turret terminals for positive reliable cable connections
- One piece nickel plated beryllium copper springs for use with standard 0.166 dia. banana jack binding posts.
- Rounded banana spring design results in maximum contact area and minimum contact resistance
- GND clearly molded in shell
- Cable opening, 7/32″ diameter



MODEL 1433 QUANTITY DISC. CODE **A** **NET 2.25**



SHIELDED DOUBLE BANANA PLUG RIGHT ANGLE CABLE ENTRY

RATED: 15A CONTINUOUS
2800 PEAK WV
5000 VDC BREAKDOWN
2.0 PF @ 1 MC.





- Shielded double plug, ¾″ spaced
- Ceramic insulating base
- Die cast aluminum shell, black anodized
- GND clearly molded in shell
- Noise pick-up reduced 70 DB
- One piece nickel plated beryllium copper springs for use with 0.166 diameter banana jack binding posts.
- Rounded banana spring design results in maximum contact area and minimum contact resistance
- Vinyl grommet and nickel plated snap button supplied



MODEL 1791 QUANTITY DISC. CODE **A** **NET 2.95**

BALANCED LINE SHIELDED DOUBLE BANANA PLUG

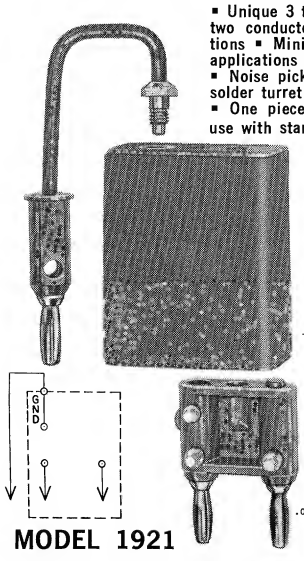

- Unique 3 terminal design allows connection to shielded two conductor cable while maintaining balanced conditions
- Minimizes ground loop errors in low signal level applications
- Die cast aluminum shell, black anodized
- Noise pick-up reduced at least 70 DB
- Gold flashed solder turret terminals for reliable noise free connections
- One piece nickel plated beryllium copper springs for use with standard 0.166 dia. banana jack binding posts.

RATED:

- 15A Continuous
- 1000 WV Peak; line to shield
- 2000 WV peak; line to line
- 2500 V peak breakdown; line to shield
- 5000 V peak breakdown, line to line
- 2.0 pf @ 1 MC Capacity; line to line
- 3.0 pf @ 1 MC. capacity; both lines to shield.



MODEL 1921 QUANTITY DISC. CODE **A** **NET 4.85**



ADAPTER — UHF RECEPTACLE TO DOUBLE BANANA PLUG



Permits UHF plug to be used with equipment having banana jacks.
UPPER: UHF receptacle, ⅝″ dia.
LOWER: Double banana plug, on ¾″ centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.
COLOR: Black.

MODEL 1707 QUANTITY DISC. CODE **A** **NET 4.85**



ADAPTER — UHF RECEPTACLE TO SHIELDED BANANA PLUGS



Permits UHF plug to be used with equipment having banana binding posts. Black anodized shield reduces noise pick-up at least 70 DB.
UPPER: UHF receptacle, ⅝″ dia.
LOWER: Double banana plug on ¾″ centers.
COLOR: Black.

MODEL 1708 QUANTITY DISC. CODE **A** **NET 4.85**



ADAPTER — BINDING POSTS TO UHF RECEPTACLE



Permits single or double banana plugs to be used with equipment having UHF plug.
UPPER: Insulated binding posts, on ¾″ centers with .166 dia. jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.
LOWER: UHF receptacle, ⅝″ dia.
COLOR: Body, Black. Binding posts: Black/Red.

MODEL 1792 QUANTITY DISC. CODE **A** **NET 5.85**



ADAPTER — BINDING POSTS TO UHF PLUG



Permits single or double banana plugs to be used with equipment having a UHF receptacle, ⅝″ dia. Convenient for use with modern oscilloscopes. Center conductor binding post Red; Ground, Black.
UPPER: Insulated binding posts, on ¾″ centers with .166 dia. jacks.
LOWER: UHF plug.

MODEL 1699 QUANTITY DISC. CODE **A** **NET 4.85**



ADAPTER — BINDING POST TO UHF PLUG

Permits single banana plug to be used with equipment having a UHF receptacle, ⅝″ dia. Adds flexibility to your oscilloscope.
UPPER: Insulated binding post with .166 dia. banana jack.
LOWER: UHF plug.

MODEL 1698 QUANTITY DISC. CODE **A** **NET 3.85**

.080 TIP AND BANANA PLUG ACCESSORIES

INSULATED SHORTING BAR





Used as a connecting link with equipment having tip jacks. Plugs internally solder bonded with 14 AWG wire. Top stack-up feature.

Current rating: 5 AMPS. cont., 10 AMPS. int. "Shorting Bar" marked on top of plug.

UPPER: Banana jacks, .166 dia. on ¾" centers. Brass, nickel plated.

LOWER: Pin tips, .080 dia. on ¾" centers. Brass, nickel plated. Cross holes (.166 dia.) in body provide side Stack-Up connections.

COLORS: Black, Red.

MODEL 1730 (Specify color)

QUANTITY DISC. CODE **A** NET .75

PLUG — COMPONENT MOUNTING — DOUBLE PIN TIP PLUG — SOLDER TURRETS





Features recess for mounting components. Gold flashed solder turret terminals for permanent noise-free connections.

UPPER: Tip jacks, beryllium copper, gold flashed; spaced on ¾" centers to accept .080 dia. pin tip plugs.

LOWER: Pin tips, .080 dia. brass, nickel plated.

COLORS: Black, Red.

MODEL 1904 (Specify color) QUANTITY DISC. CODE **A** NET .85

COMPONENT MOUNTING PLUG — BANANA JACKS TO DOUBLE PIN TIP — SET SCREWS





Permits single or double banana plugs to be used in equipment having tip jacks. Features recess for component mounting. Internal set screws firmly secure wire leads.

UPPER: Banana jacks, .166 dia., on ¾" centers. Brass, nickel plated.

LOWER: Pin tips .080 dia. on ¾" centers. Brass, nickel plated.

COLOR: Black.

MODEL 1858 QUANTITY DISC. CODE **A** NET .75

ADAPTER — BANANA JACK TO PIN TIP

Permits standard single banana plug patch cords to be used with equipment having tip jacks.

UPPER: Banana jack, .166 dia. Brass, nickel plated.

LOWER: Pin tip, .080 dia. Brass, nickel plated. Cross hole (.166 dia.) in body provides side Stack-Up connection.

COLORS: Black, Red.

Standard Package: 10 (per color)

MODEL 1432 (Specify Color) QUANTITY DISC. CODE **A** NET .15

SOLDERLESS PIN TIP PLUG — STACK-UP

Wire firmly held in place with internal set screw, eliminating soldering. Assembly of test leads simplified.

UPPER: Tip jack, beryllium copper, gold flashed; accepts .080 dia. pin.

LOWER: Pin tip, .080 dia., brass, nickel plated.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL 1922 (Specify color) QUANTITY DISC. CODE **A** NET .50

DOUBLE BANANA PLUG SPLICE



Provides rapid method for splicing cables. Reduces necessity of storing extra long cables. Molded thermo-plastic body eliminates shock hazard by completely enclosing banana plug contact. Brass, nickel plated banana jacks. .166 dia., on ¾" centers.

COLORS: Black, Red.



MODEL 1823 (Specify color) QUANTITY DISC. CODE **A** NET .50

SINGLE BANANA PLUG SPLICE



Provides rapid method for splicing single banana plug patch cords. Reduces the necessity of storing extra long patch cords. Molded thermo-plastic body eliminates shock hazard by completely enclosing banana plug contact. Brass, nickel plated banana jack, .166 dia.

COLORS: Black, Red.

Standard Package: 10 (per color)



MODEL 1829 (Specify color) QUANTITY DISC. CODE **A** NET .25

ADAPTER — .080 TIP JACK TO BANANA PLUG



Permits .080 dia. pin tip patch cords to be used with equipment having banana jacks. Insulation molded to plug body.

UPPER: Tip jack, beryllium copper, gold flashed. Accepts .080 dia. pin.

LOWER: Banana plug, one piece nickel plated beryllium copper spring for use with standard 0.166 dia. banana jack. Cross hole (.166 dia.) in body provides side Stack-Up connection.

COLORS: Black, Red.

MODEL 1809 (Specify Color) QUANTITY DISC. CODE **A** NET .50

SOLDERLESS BANANA PLUG — STACK-UP



Wire firmly held in place with internal set screw, eliminating soldering. Assembly of test leads simplified.

UPPER: Banana jack, .166 dia.; Brass, nickel plated.

LOWER: Banana plug, one piece nickel plated beryllium copper spring for use with standard 0.166 dia. banana jack.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL 1325 (Specify color) QUANTITY DISC. CODE **A** NET .50

SOLDERLESS BANANA PLUG WITH SAFETY COLLAR — STACK-UP



Features: Integral safety collar insulates exposed wire leads. Wire firmly held in place with internal set screw, eliminating soldering. Assembly of test leads simplified.

UPPER: Banana jack, .166 dia.; Brass, nickel plated.

LOWER: Banana plug, one piece nickel plated beryllium copper spring for use with standard 0.166 dia. banana jack.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL 1825 (Specify Color) QUANTITY DISC. CODE **A** NET .50

CREATE passive and active networks, voltage dividers, isolation networks or attenuators with the Split-Terminal isolation plugs described below.

Gold flashed solder turret terminals provide permanent, reliable noise-free connections for component mounting.

Tough thermo-plastic material molded to plug body and connectors insures maximum strength, moisture resistance and excellent insulative properties.

Specifications for MDP-X, 1390, 1837, 1468:

- Fits standard 0.166 dia. banana jack.
- Spring, heat treated beryllium copper alloy 25 per QQ-C-533.
- Plug body, Brass per QQ-B-626 Comp. 22.
- Nickel plated per QQ-N-290, Class 2.
- Contact resistance less than 0.001 ohms per banana plug.

TYPICAL APPLICATION

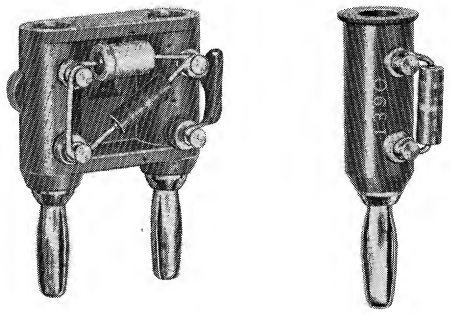

ACTUAL SIZE

MODEL MDP-X **MODEL 1390**

DOUBLE BANANA PLUG, FOUR TERMINAL ISOLATION



Provides four terminal isolation. Top Stack-Up receptacles isolated from lower plugs. Ideal for insertion of matching networks in laboratory VTVM's, signal generators, etc. Gold flashed solder turret terminals for permanent noise-free connections.



UPPER: Double banana jacks, .166 dia., on ¾" centers.
LOWER: Double banana plug on ¾" centers.
COLOR: Red.

MODEL MDP-X QUANTITY DISC. CODE **A** **NET 3.25**

ADAPTER — BINDING POSTS TO BNC PLUG, ISOLATION





Permits single or double banana plugs to be used with equipment having BNC receptacle. Provides isolation for a four terminal network. Binding posts facilitate connections of test leads or additional components. Gold flashed solder turret terminals provide permanent noise-free connections.

UPPER: Insulated binding posts, on ¾" centers with .166 dia. jacks.
LOWER: BNC plug.
COLOR: Body, Black.
Binding Posts: Black/Red.

MODEL 1469 QUANTITY DISC. CODE **A** **NET 10.85**

PLUG — SINGLE BANANA, ISOLATION





Provides two terminal isolation. Top Stack-Up receptacle is isolated from lower plug to permit addition of series resistors, diodes, etc. Ideal for computers, lab. circuit design and testing. Gold flashed solder turret terminals for permanent noise-free connections.

UPPER: Banana jack, .166 dia.
LOWER: Banana plug.
COLORS: Black, Red.

MODEL 1390 (Specify color) QUANTITY DISC. CODE **A** **NET .95**

DOUBLE BANANA PLUG, THREE TERMINAL ISOLATION



Provides three terminal isolation. Excellent for "L" and "Pi" networks. Plug and receptacle nickel plated. Gold flashed solder turret terminals for permanent noise-free connections. "Ground" is straight feed-thru. Hot side isolated.



UPPER: Banana jacks, .166 dia. on ¾" centers.
LOWER: Double banana plug on ¾" centers.
COLOR: Blue.

MODEL 1837 QUANTITY DISC. CODE **A** **NET 2.50**

ADAPTER — BNC RECEPTACLE TO DOUBLE BANANA PLUG, ISOLATION





Permits BNC plug to be used with equipment having banana jacks. Provides isolation for a four terminal network. Excellent for matching pad networks. Gold flashed solder turret terminals for permanent noise-free connnections.

UPPER: BNC receptacle.
LOWER: Double banana plug, on ¾" centers.
COLOR: Black.

MODEL 1468 QUANTITY DISC. CODE **A** **NET 9.85**

PLUG — PIN TIP, ISOLATION



Pin tip jack is isolated from .080 pin tip plug. Provides for addition of series components. Ideal for use with computer boards, lab circuit designs, etc. Gold flashed solder turret terminals for permanent noise-free connections.



UPPER: Tip jack, beryllium copper, gold flashed; accepts .080 dia. pin.
LOWER: Pin tip, .080 dia. Brass, nickel plated.
COLORS: Black Red.

MODEL 1910 (Specify color) QUANTITY DISC. CODE **A** **NET .95**

TRANSISTOR SOCKET



For use in testing 3 lead transistors with .017 dia. leads. Beryllium copper springs for long life. Ideal for aging racks, incoming inspection, life testing, etc.



MODEL TS-187 **MODEL TS-187R**

QUANTITY DISC. CODE **A**

MODEL	TEMP. RANGE	INSULATION RESISTANCE	COLOR	NET
TS187	—100°C To +300°C.	1 x 10^5 Megohms Min. @ 500 V.D.C. @ 40% R.H., 24°C.	Black	1.75
TS187R	—125°C To +700°C.	1 x 10^6 Megohms Min. @ 500 V.D.C. @ 40% R.H., 24°C.	Red	3.75

INSULATED SPADE LUG ADAPTER



Permits single banana plug to be used with equipment having binding posts. Tough thermoplastic molded to body for maximum reliability and low shock hazard. Spade lug body, one piece machined brass, nickel plated.

UPPER: Banana jack, .166 dia.
LOWER: Spade lug, .26 opening.
COLORS: Black, Red.

QUANTITY DISC. CODE **A**

MODEL 1614 (Specify color) **NET .35**

ADAPTER — TRANSISTOR TEST SOCKET





Permits the insertion of transistors with .017 dia. leads into equipment having banana jacks on ¾" centers. Ideal for incoming inspection. Transistor socket contact and banana spring made of beryllium copper. Heavy duty phenolic construction. Insulation resistance: 1 x 10^5 megohms min. @ 500 V.D.C., at 40% R.H., 24°C.

MODEL 1472 QUANTITY DISC. CODE **A** **NET 5.85**

TRANSISTOR BREADBOARD SOCKET

For Transistors with TO-5, and TO-12 Lead Arrangement

Excellent for breadboarding. All connections made on top of breadboard for quick accessible test points.



FEATURES:

- Closed entry contacts accept .016—.019 dia. leads.
- Beryllium copper contacts silver plated.
- Contact numbers on top of socket.
- Socket molded of low loss mica filled phenolic.
- Easily mounted with two #2 screws.



MODEL XS-T4 QUANTITY DISC. CODE **C** **NET .59**

ADAPTER — AMP PROGRAM BOARD





Permits single or double banana plugs to be used with AMP program boards having ¼" or ⅜" center to center spacing. Ideal for mounting components. Internal set screws secure leads. Useful in analog computer applications, etc.

UPPER: Banana jacks, on ¾" centers. Brass, nickel plated.
LOWER: Dual AMP pins, on ¼" or ⅜" centers.

QUANTITY DISC. CODE **A**

MODEL	PIN SPACING	COLOR	NET
MODEL 1977 — 1977	⅜"	Black	3.85
MODEL 1991 — 1991	¼"	Gray	3.85

INSULATED ALLIGATOR CLIP TO BANANA JACK

Clip, No. 60 Mueller, Steel, Cadmium Plated. Vinyl insulators, No. 62 (5 Red, 5 Black). Unassembled.



Standard Package of 10 clips and 10 insulators.

MODEL 2240 QUANTITY DISC. CODE **A** **NET .15**

INSULATED ALLIGATOR CLIP TO PIN TIP JACK



Alligator Clip, Steel, Cad. Plated. Tip Jack, Beryllium Copper, gold flashed, accepts .080 diam. Pin tip plug. Vinyl insulators (5 Red, 5 Black). Unassembled.



Standard Package of 10 clips and 10 insulators.

MODEL 1437 QUANTITY DISC. CODE **A** **NET .50**

INSULATED BANANA JACK ASSEMBLY

Used with standard banana plug. Body, one piece brass, silver plated. Heavy duty shouldered ceramic insulator. Nickel plated lockwasher and hex nut included.



FEATURES:

- Closed entry receptacle, .166 dia.
- Insulator head molded to body
- Mounts in ⅜" dia. hole, panels up to ⅜" thick.
- Solder turret terminal
- Rated: 2,500 WVDC

1581 — Black **1581-5 — Green**
1581-1 — Brown **1581-6 — Blue**
1581-2 — Red **1581-7 — Violet**
1581-3 — Orange **1581-8 — Gray**
1581-4 — Yellow **1581-9 — White**

(Specify Color)

QUANTITY DISC. CODE **A**

MODEL 1581 Standard Package: 10 (per color) Unassembled **NET .25**





MODEL 2269

INSULATED DOUBLE BANANA JACK ASSEMBLY NEW



Double banana jack on ¾" centers with one red and one black jack. Choice of Black or Red plate.

MODEL 2269 Black Plate
MODEL 2269-2 Red Plate

QUANTITY DISC. CODE **A** **NET .75**

Boxes of unlimited uses for packaging of components and circuitry. Also ideal for potting and encapsulating. Available in three sizes as shown below. Housing molded of thermosetting electrical grade phenolic. Cover, punched XXP laminated paper base phenolic. Color, Housing and cover, Black. Cover plate and self tapping screws included.

Operating Temperature: —25°C to +125°C.

BLACK BOX—JUNIOR SIZE

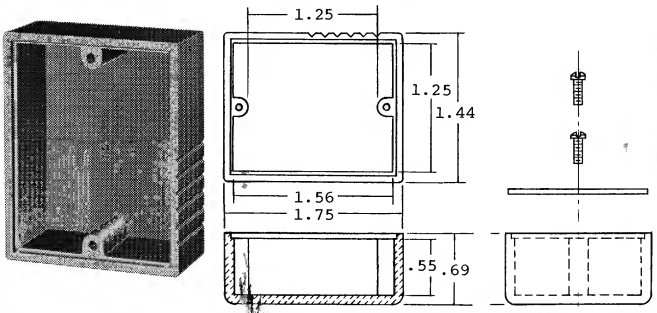

MODEL 2105 QUANTITY DISC. CODE **A** **NET .75**

BLACK BOX—QUEEN SIZE

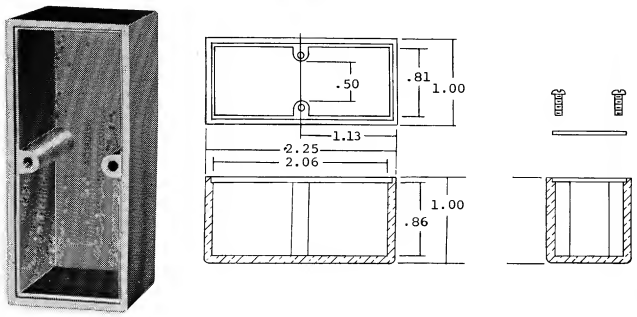

MODEL 2103 QUANTITY DISC. CODE **A** **NET .75**

BLACK BOX—KING SIZE

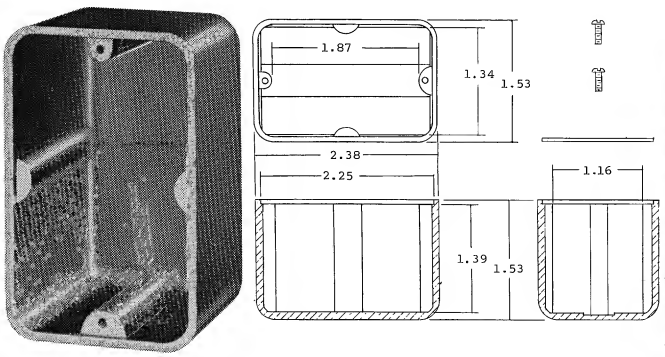

MODEL 2104 QUANTITY DISC. CODE **A** **NET .75**

CREATE passive and active networks, voltage dividers, isolation networks or attenuators with these units. Solder turret terminals for permanent noise-free connection of components, etc. Entire unit may be potted or encapsulated.

Housing molded of thermosetting electrical grade phenolic. Cover, punched XXP laminated paper base phenolic. Color, housing and cover, BLACK. Cover plate and self tapping screws included.

APPLICABLE SPECIFICATIONS:

Operating Temp: —25°C to +125°C.
Working Voltage: 5000 VDC.
Current: 15 Amps Cont., 30 Amps Int.

COMPONENT MOUNTING—ACROSS BANANA PLUGS

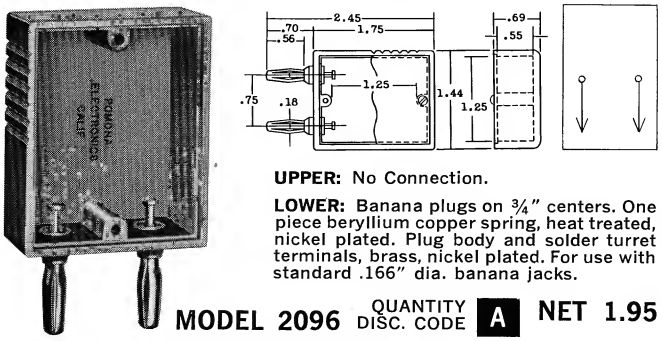

UPPER: No Connection.

LOWER: Banana plugs on ¾" centers. One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

MODEL 2096 QUANTITY DISC. CODE **A** **NET 1.95**

COMPONENT MOUNTING—BANANA JACKS TO DOUBLE BANANA PLUG—JUNIOR SIZE

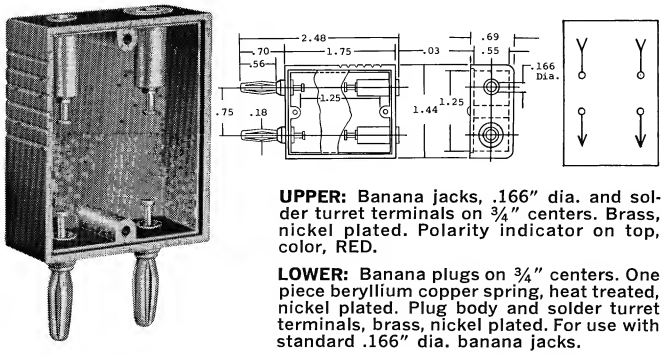

UPPER: Banana jacks, .166" dia. and solder turret terminals on ¾" centers. Brass, nickel plated. Polarity indicator on top, color, RED.

LOWER: Banana plugs on ¾" centers. One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

MODEL 2098 QUANTITY DISC. CODE **A** **NET 2.85**

COMPONENT MOUNTING—BANANA JACKS TO DOUBLE BANANA PLUG— KING SIZE

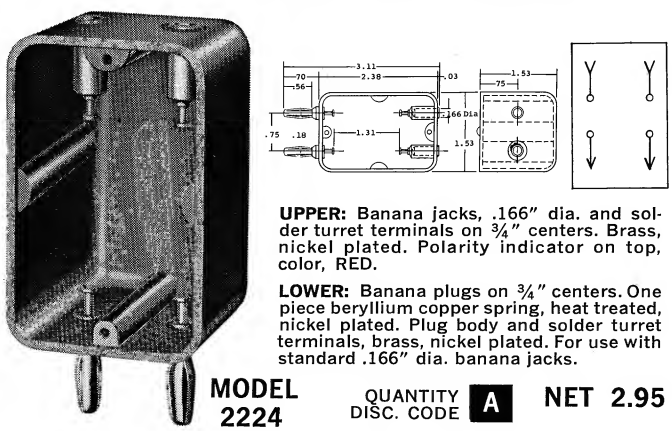

UPPER: Banana jacks, .166" dia. and solder turret terminals on ¾" centers. Brass, nickel plated. Polarity indicator on top, color, RED.

LOWER: Banana plugs on ¾" centers. One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

MODEL 2224 QUANTITY DISC. CODE **A** **NET 2.95**

CREATE passive and active networks, voltage dividers, isolation networks or attenuators with these units. Solder turret terminals for permanent noise-free connection of components, etc. Entire unit may be potted or encapsulated.

Housing molded of thermosetting electrical grade phenolic. Cover, punched XXP laminated paper base phenolic. Color, housing and cover, BLACK. Cover plate and self tapping screws included.

COMPONENT MOUNTING—BNC RECEPTACLE TO DOUBLE BANANA PLUG

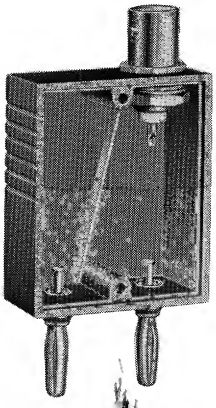

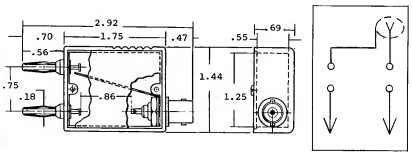

UPPER: BNC Receptacle UG1094/U

LOWER: Banana plugs on ¾" centers. One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

APPLICABLE SPECIFICATIONS:
Operating Temp: —25°C to +125°C.
Working Voltage: 500 V Peak.

MODEL 2097 QUANTITY DISC. CODE **A** **NET 3.85**

COMPONENT MOUNTING—BNC RECEPTACLE TO BNC PLUG WITH BINDING POSTS

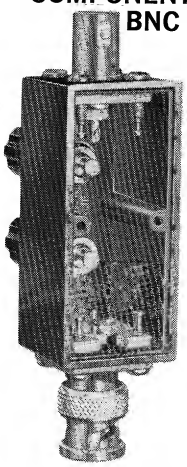

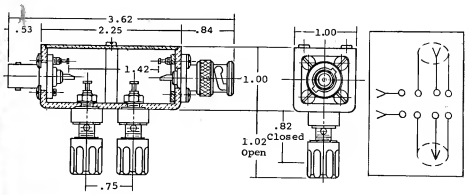

UPPER: BNC Receptacle UG290A/U

CENTER: Banana jack binding posts with solder turret terminals. Red and Black.

LOWER: BNC Plug. UG1104A/U.

APPLICABLE SPECIFICATIONS:
Operating Temp: —25°C to +125°C.
Working Voltage: 500 V Peak.

MODEL 2100 QUANTITY DISC. CODE **A** **NET 8.95**

COMPONENT MOUNTING—(3) ¾" SPACED BANANA PLUGS

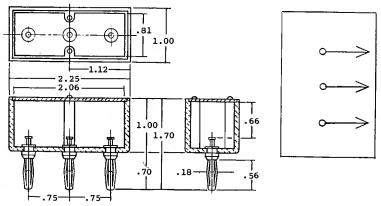

Three-in-line ¾" Spaced Banana Plugs.

One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

APPLICABLE SPECIFICATIONS:
Operating Temp: —25°C to +125°C.
Working Voltage: 5000 VDC.
Current: 15 Amps Cont., 30 Amps Int.

MODEL 2095 QUANTITY DISC. CODE **A** **NET 2.75**

COMPONENT MOUNTING—BNC RECEPTACLE BOTH ENDS

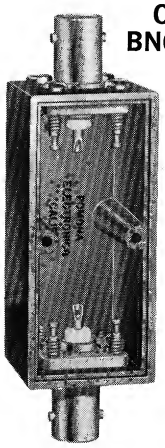

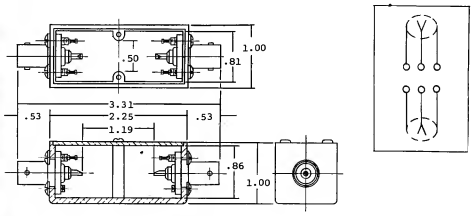

UPPER: BNC Receptacle UG290A/U

LOWER: BNC Receptacle UG290A/U

APPLICABLE SPECIFICATIONS:
Operating Temp: —25°C to +125°C.
Working Voltage: 500 V Peak.

MODEL 2101 QUANTITY DISC. CODE **A** **NET 4.85**

COMPONENT MOUNTING—BNC RECEPTACLE TO BNC PLUG

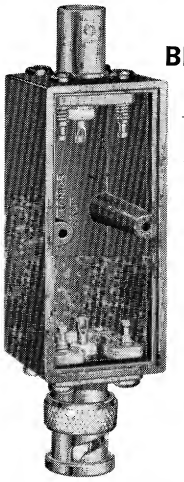

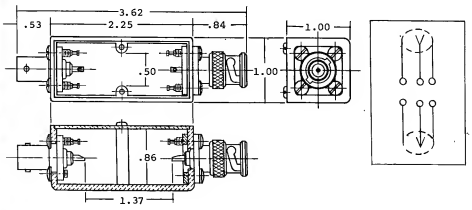

UPPER: BNC Receptacle UG290A/U

LOWER: BNC Plug UG1104A/U

APPLICABLE SPECIFICATIONS:
Operating Temp: —25°C to +125°C.
Working Voltage: 500 V Peak.

MODEL 2099 QUANTITY DISC. CODE **A** **NET 6.85**

COMPONENT MOUNTING—BNC RECEPTACLE "T"

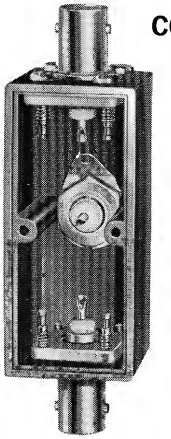

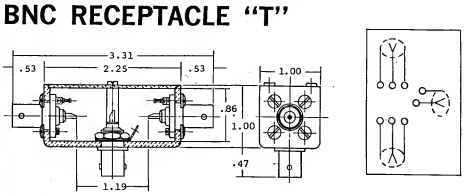

UPPER: BNC Receptacle UG290A/U

CENTER: BNC Receptacle UG1094/U

LOWER: BNC Receptacle UG290A/U

APPLICABLE SPECIFICATIONS:
Operating Temp: —25°C to +125°C.
Working Voltage: 500 V Peak.

MODEL 2102 QUANTITY DISC. CODE **A** **NET 7.85**

"BLACK BOXES" & 1.2" SPACED ACCESSORIES

CREATE passive and active networks, voltage dividers, isolation networks or attenuators with these units. Solder turret terminals for permanent noise-free connection of components, etc. Entire unit may be potted or encapsulated.

Housing molded of thermosetting electrical grade phenolic. Cover, punched XXP laminated paper base phenolic. Color, housing and cover, BLACK. Cover plate and self tapping screws included.

NEW COMPONENT MOUNTING—ACROSS PIN TIP PLUGS

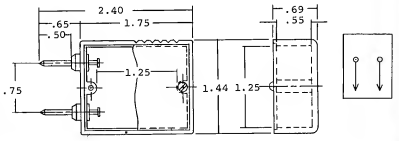

UPPER: No Connection.
LOWER: Pin tip plugs, .080 dia. on ¾" centers. Plug bodies and solder turret terminals, brass, nickel plated.

APPLICABLE SPECIFICATIONS:
Operating Temp.: —25°C to +125°C.
Working Voltage: 5000 VDC.
Current: 5 Amps Cont., 10 Amps Int.

MODEL 2268 QUANTITY DISC. CODE **A** **NET 1.95**

NEW COMPONENT MOUNTING—PIN TIP JACKS TO DOUBLE PIN TIP PLUG—JUNIOR SIZE



UPPER: Tip jacks, on ¾" centers, per MS-16108. One Red, one Black.
LOWER: Pin tip plugs, .080 dia. on ¾" centers. Plug bodies and solder turret terminals, brass, nickel plated.

APPLICABLE SPECIFICATIONS:
Operating Temp.: —25°C to +125°C.
Working Voltage: 5000 VDC.
Current: 5 Amps Cont., 10 Amps Int.

MODEL 2260 QUANTITY DISC. CODE **A** **NET 4.85**

NEW COMPONENT MOUNTING—BINDING POSTS TO DOUBLE BANANA PLUG—JUNIOR SIZE





UPPER: Banana jack binding posts with solder turret terminals, on ¾" centers. Red and Black.
LOWER: Banana plugs on ¾" centers. One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

APPLICABLE SPECIFICATIONS:
Operating Temp.: —25°C to +125°C.
Working Voltage: 5000 VDC.
Current: 15 Amps Cont., 30 Amps Int.

MODEL 2259 QUANTITY DISC. CODE **A** **NET 4.85**

NEW COMPONENT MOUNTING—BINDING POSTS TO DOUBLE BANANA PLUG—KING SIZE

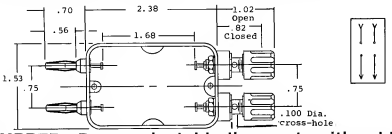

UPPER: Banana jack binding posts with solder turret terminals, on ¾" centers. Red and Black.
LOWER: Banana plugs on ¾" centers. One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

APPLICABLE SPECIFICATIONS:
Operating Temp.: —25°C to +125°C.
Working Voltage: 5000 VDC.
Current: 15 Amps Cont., 30 Amps Int.

MODEL 2262 QUANTITY DISC. CODE **A** **NET 4.85**

NEW DOUBLE BANANA PLUG TO MINIATURE DOUBLE BANANA PLUG

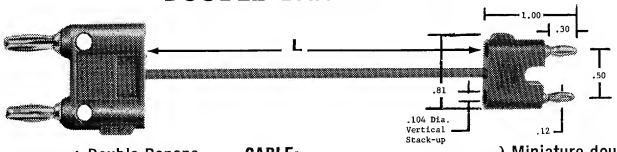

CONN: 1st END } Double Banana Plug, on ¾" Centers.
CABLE: Shielded Coax., RG174/U.
CONN: 2nd END } Miniature double banana plug on ½" Centers.

CABLE DESCRIPTION:	MODEL	LENGTH	NET
Shielded coax., RG174/U, Polyethylene Insulation. Vinyl jacket. Nom. Cap. 29.5 pf/ft. Nom. Imp. 50 Ohms. Nom. O.D. .100". Color: Cable and Double Plug, Black.	2443-K-12	12"	4.85
	2443-K-24	24"	4.85
	2443-K-36	36"	4.85
	2443-K-48	48"	5.00
	2443-K-60	60"	5.15

★ QUANTITY DISC. CODE **B**

MINIATURE—DOUBLE BANANA PLUG BOTH ENDS



CONN: 1st END } Miniature Double Banana plug on ½" centers.
CABLE: Shielded Coax., RG174/U.
CONN: 2nd END } Miniature double banana plug on ½" centers.

Banana jack body, one piece machined brass, gold flashed. .104 dia. banana jacks on ½" centers permit top Stack-Up for multiple connections. Tough thermoplastic molded to plug bodies. Molded double plug matches color of cable. RG174/U Cable, Black.
A miniature double banana plug on ½" centers. This patch cord enables miniaturization of test equipment and high density packaging for patch systems. Banana plug springs precision formed of one piece beryllium copper, heat treated for maximum life and low contact resistance.

RATINGS: Operating Temp: —25°C to +80°C. Working Voltage: 1500 VDC.

★ QUANTITY DISC. CODE **B**

MODEL	LENGTH	NET
2247-K-12	12"	4.85
2247-K-24	24"	4.85
2247-K-36	36"	4.85
2247-K-48	48"	5.00
2247-K-60	60"	5.15

MINIATURE—DOUBLE BANANA PLUG TO BNC MALE



CONN: 1st END } Miniature Double Banana Plug on ½" centers.
CABLE: Shielded Coax., RG174/U
CONN: 2nd END } Male BNC

CABLE DESCRIPTION:	MODEL	LENGTH	NET
Shielded coax., RG174/U, Polyethylene Insulation. Vinyl jacket. Nom. Cap. 29.5 pf/ft. Nom. Imp. 50 Ohms. Nom. O.D. .100". Color: Cable and Double plug, Black.	2248-K-12	12"	5.85
	2248-K-24	24"	5.85
	2248-K-36	36"	5.85
	2248-K-48	48"	6.00
	2248-K-60	60"	6.15

MODEL 2248 ★ QUANTITY DISC. CODE **B**

MINIATURE—BANANA PLUG STACK-UP PATCH CORD

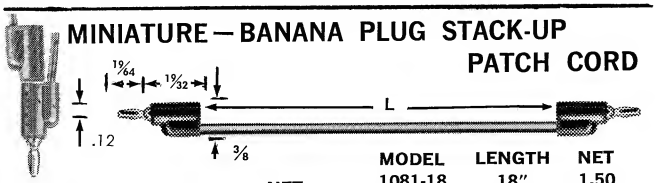

MODEL	LENGTH	NET
1081-4	4"	1.50
1081-8	8"	1.50
1081-12	12"	1.50
1081-18	18"	1.50
1081-24	24"	1.50
1081-36	36"	1.50
1081-48	48"	1.55
1081-60	60"	1.60

Fits miniature banana jacks with .104 dia. Compact size. For use where receptacles are spaced closely together.

BANANA PLUG: Spring, one piece beryllium copper heat treated. Gold flashed.
WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible polyvinyl insulation .087" O.D.
RATED: 5 A. Cont., 10 A. Int. 5,000 W.V.D.C.
OPERATING TEMP.: —0°C to +105°C.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL 1081 (Specify Color) ★ QUANTITY DISC. CODE **A**

★ Various lengths may be aggregated for best quantity price.

POMONA ELECTRONICS

1/2" SPACED MINIATURE BANANA PLUGS AND ACCESSORIES

Miniature Double Banana plugs on ½" centers. A state of the art development for the ever increasing demand for miniaturization.

Banana plug springs precision formed of one piece beryllium copper, heat treated for maximum life and low contact resistance. Tough thermoplastic molded to plug bodies.

SPECIFICATIONS:

- Fits .104 dia. miniature banana jacks.
- Plug body brass, per QQ-B-626, Comp. #22.
- Gold flashed per MIL-G-45204 Type II (.00002/.00003).

MINIATURE—DOUBLE BANANA PLUG WITH SET SCREWS







Miniature double banana plug on ½" centers. Internal set screws to secure cable or component leads. .104 dia. banana jacks on ½" centers permit top Stack-Up for multiple connections.

COLORS: Black, Red.

RATINGS:
Operating Temp: —25°C to +85°C.
Working voltage: 2500 VDC.
Current: 5 Amps Cont., 10 Amps Int.

MODEL 2244 Black
MODEL 2244-2 Red

MODEL 2244 QUANTITY DISC. CODE **A** **NET .75**

MINIATURE—DOUBLE BANANA PLUG WITH SOLDER TURRET TERMINALS



Miniature double banana plug on ½" centers. Solder turret terminals for permanent noise-free connections of cables or components. .104 dia. banana jacks on ½" centers permit top stack-up for multiple connections.

COLORS: Black, Red.

RATINGS:
Operating Temp: —25°C to +85°C.
Working voltage: 2500 VDC.
Current: 5 Amps Cont., 10 Amps Int.

Model 2245 Black
Model 2245-2 Red

MODEL 2245 QUANTITY DISC. CODE **A** **NET .85**

MINIATURE—DOUBLE BANANA PLUG WITH MOLDED PRECISION RESISTOR





Ideal where rapid interchange of resistance values is required. Deposited carbon 1% ¼ watt, molded internally. .104 dia. banana jacks on ½" centers permit Top Stack-Up for multiple connections. Resistance value stamped on plug.

COLOR: Blue

(OHMS)		
	50	10K
	600	50K
	1K	100K

MODEL 2246 (Specify Value) QUANTITY DISC. CODE **A** **NET 2.75**

MINIATURE—DOUBLE BANANA PLUG WITH SHORTING BAR





Ideal as a connecting link for use with ½" spaced banana jacks. .104 dia. banana jacks on ½" centers permit top Stack-Up for multiple connections. Banana plugs internally solder-bonded with #18 AWG wire. "Shorting Bar" stamped on plug.

COLORS: Black, Red.

RATINGS:
Operating Temp: —25°C to +85°C.
Current: 5 Amps Cont., 10 Amps Int.

MODEL 2035 Black
MODEL 2035-2 Red

MODEL 2035 QUANTITY DISC. CODE **A** **NET .95**

NEW

ADAPTER—STANDARD BANANA JACK TO MINIATURE BANANA PLUG

Permits standard banana plug to be used with equipment having miniature banana jacks.

UPPER: Banana jack, .166 dia.; Brass, nickel plated.

LOWER: Miniature banana plug, one piece nickel plated beryllium copper spring for use with .104 dia. miniature banana jacks.

COLORS: Black, Red.

MODEL 2138
2138-0 Black
2138-2 Red
NET .50

QUANTITY DISC. CODE **A**

ADAPTER—MINIATURE BANANA JACK TO STANDARD BANANA PLUG

Permits miniature banana plugs to be used with equipment having standard banana jacks.

UPPER: Miniature banana jack, .104 dia.; Brass, nickel plated.

LOWER: Standard banana plug, one piece nickel plated beryllium copper spring for use with .166 dia. banana jacks.

COLORS: Black, Red.

MODEL 2477
2477-0 Black
2477-2 Red
NET .50

QUANTITY DISC. CODE **A**

Developed by the need for miniaturization of test equipment and test panels. The new generation of test jacks. Built to Pomona Electronics high standard of quality.

Wide selection of colors available.

Molded of High Impact Polycarbonate Thermoplastic. Banana Jack body, one piece machined brass, gold flashed. Heavy duty shouldered ceramic insulator. Lockwasher and hex nut included, unassembled, nickel plated.

SPECIFICATIONS:

- Closed entry jack .104 dia.
- Insulator head molded to body
- Mounts in ¼" dia. hole
  Model 2142, Panels up to ¼" thick
  Model 2143, Panels up to 3/16" thick
- Solder turret terminal

RATINGS:
Operating Temp: —65°C to +150°C.
Working Voltage: 1500 VDC
Current :5 Amps Cont., 10 Amps Int.





MINIATURE—INSULATED BANANA JACK

2142 —Black	**2142-5—Green**
2142-1—Brown	**2142-6—Blue**
2142-2—Red	**2142-7—Violet**
2142-3—Orange	**2142-8—Gray**
2142-4—Yellow	**2142-9—White**

MODEL 2142 **Standard Package: 10 (per color)** QUANTITY DISC. CODE **A** **NET .25**





MINIATURE—INSULATED DOUBLE BANANA JACK

Double banana jack on ½"centers with one red and one black jack. Choice of Black or Red plate.

MODEL 2143 —Black Plate
MODEL 2143-2—Red Plate

MODEL 2143 QUANTITY DISC. CODE **A** **NET .75**

A complete 5-way Binding Post in "Miniature." Captive Thumb Nut and Binding Post Body, machined brass; gold or nickel plated. Thumb Nut and Mounting Base molded of High Impact Polycarbonate Thermoplastic. Heavy Duty Shouldered Ceramic Insulator. Lockwasher and hex nut included, unassembled, nickel plated.

SPECIFICATIONS:

- 5-way Binding Post
- Mounts ¼" dia. "D" hole
- Panels up to 3/16" thick
- Captive Thumb Nut
- .082 dia. Cross hole
- Thumb Nut and Binding Post Body—
  Gold Flashed per MIL-G-45204 Type 2 over Copper per MIL-C-14450
  OR Nickel Plated per QQ-N-290 Class 2.

RATINGS:

- Operating Temp.: —65°C to +150°C.
- Working Voltage: 1500 VDC.
- Current: 5 Amps Cont., 10 Amps Int.

NEW

MINIATURE—INSULATED BINDING POST







Panel Cutout

MODEL 2382-*
*(Specify Color)
Gold Flashed Assembly
NET .90

MODEL 2439-*
*(Specify Color)
Nickel Plated Assembly
NET .75

(*) COLORS

-0 Black	**-4 Yellow**	**-8 Gray**
-1 Brown	**-5 Green**	**-9 White**
-2 Red	**-6 Blue**	
-3 Orange	**-7 Violet**	

QUANTITY DISC. CODE **A**

NEW

MINIATURE—INSULATED DOUBLE BINDING POST





Panel Cutout

Double binding post body on ½" centers with one red and one black binding post. Choice of Black or Red plate.

MODEL 2383-*
*(Specify Color)
Gold Flashed Assembly
NET 1.80

MODEL 2440-*
*(Specify Color)
Nickel Plated Assembly
NET 1.50

COLORS
-0 Black Plate
-2 Red Plate

QUANTITY DISC. CODE **A**

POMONA ELECTRONICS

SHIELDED "BLACK BOXES"

NOW AVAILABLE, *SHIELDED* "BLACK BOXES." Boxes that fulfill the requirement for RF applications.

Ideal for compact packaging, eg., voltage dividers, isolation networks, impedance matching networks, and other varied uses.

Cover and self-tapping screws included.

APPLICABLE SPECIFICATIONS: (ALL MODELS)

Operating Temp.: −55°C to +150°C.
Working Voltage: 500 V Peak (Model 2415, 1500 V Peak).
Noise Rejection: Greater than 70DB.

FEATURES:

- SHIELDED HOUSING; Die Cast Aluminum. FINISH: BLUE baked enamel per Federal Standard 595 #25109 over phosphoric etch per MIL-C-15328A.
- COVER; .040 Thick Aluminum #6061-T6 with clear anodized finish per MIL-A-8625A.
- Four screws secure cover for proper shielding.
- Solder turret terminals for permanent noise free connection of components.

NEW

COMPONENT MOUNTING— BNC RECEPTACLE BOTH ENDS

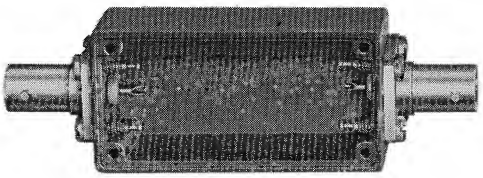

CONN: } BNC Receptacle Jack, **1st END** { UG290A/U.
CONN: } BNC Receptacle Jack, **2nd END** { UG290A/U.



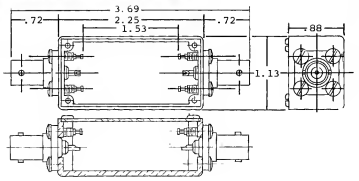

MODEL 2390 QUANTITY DISC. CODE **A** **NET 6.85**

NEW

COMPONENT MOUNTING— BNC RECEPTACLE "T"

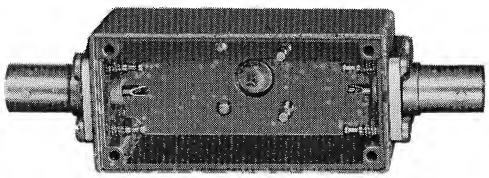

CONN: } BNC Receptacle Jack, **1st END** { UG290A/U.
CENTER: BNC Receptacle Jack, UG290A/U.
CONN: } BNC Receptacle Jack, **2nd END** { UG290A/U.



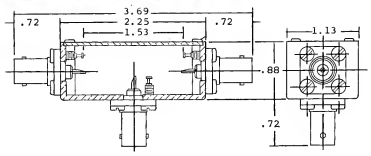

MODEL 2392 QUANTITY DISC. CODE **A** **NET 9.50**

NEW

COMPONENT MOUNTING— BNC RECEPTACLE TO BNC PLUG

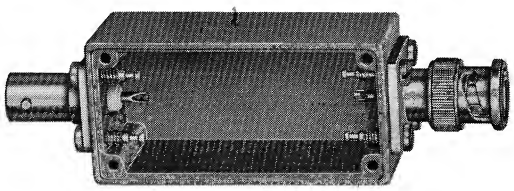

CONN: } BNC Receptacle Jack, **1st END** { UG290A/U.
CONN: } BNC Receptacle Plug, **2nd END** { UG1104A/U.



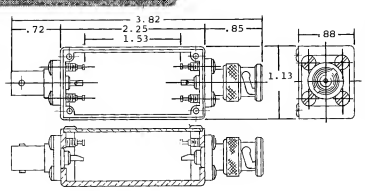

MODEL 2391 QUANTITY DISC. CODE **A** **NET 7.85**

NEW

COMPONENT MOUNTING— TNC RECEPTACLE BOTH ENDS

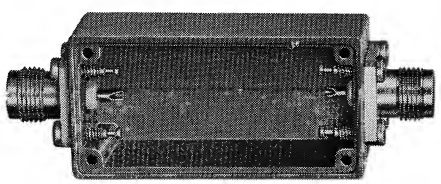

CONN: } TNC Receptacle Jack. **1st END**
CONN: } TNC Receptacle Jack. **2nd END**





MODEL 2396 QUANTITY DISC. CODE **A** **NET 7.85**

NEW

COMPONENT MOUNTING— BNC RECEPTACLE TO BNC PLUG WITH BINDING POSTS

CONN: } BNC Receptacle Jack, **1st END** { UG290A/U.
CENTER: Banana jack binding posts with solder turret terminals. Red and Black.
CONN: } BNC Receptacle Plug, **2nd END** { UG1104A/U.

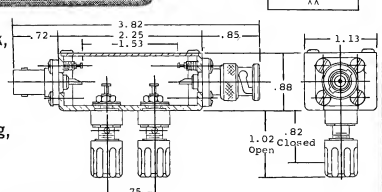

MODEL 2393 QUANTITY DISC. CODE **A** **NET 10.85**

NEW

COMPONENT MOUNTING— TNC RECEPTACLE TO TNC PLUG

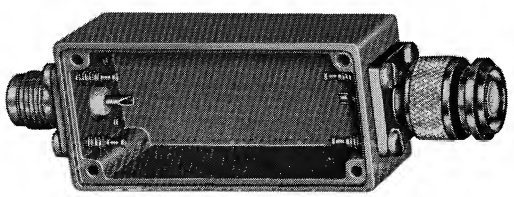

CONN: } TNC Receptacle Jack. **1st END**
CONN: } TNC Receptacle Plug. **2nd END**





MODEL 2395 QUANTITY DISC. CODE **A** **NET 9.50**

MODEL 2397 Above boxes available blank, less connectors. Finish; BLUE per above. Includes cover and mounting screws. QUANTITY DISC. CODE **A** **NET 1.50**

NEW

COMPONENT MOUNTING— UHF RECEPTACLE BOTH ENDS

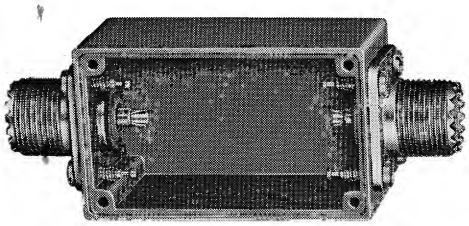

CONN: 1st END } UHF Receptacle Jack.
CONN: 2nd END } UHF Receptacle Jack.

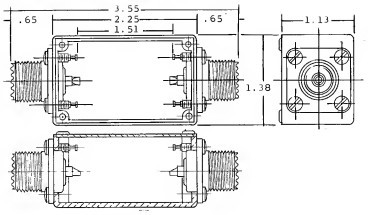



MODEL 2412 QUANTITY DISC. CODE A NET 6.85

NEW

COMPONENT MOUNTING— TYPE "N" RECEPTACLE BOTH ENDS

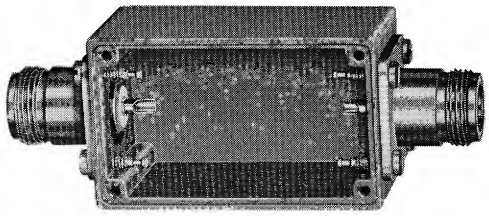

CONN: 1st END } Type "N" Receptacle Jack, UG58A/U.
CONN: 2nd END } Type "N" Receptacle Jack, UG58A/U.

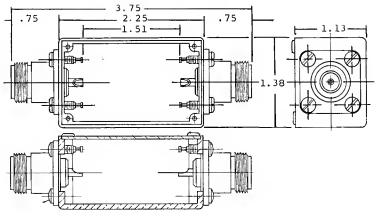



MODEL 2410 QUANTITY DISC. CODE A NET 6.85

NEW

COMPONENT MOUNTING— UHF RECEPTACLE TO UHF PLUG

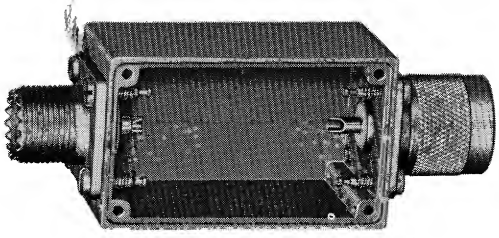

CONN: 1st END } UHF Receptacle Jack.
CONN: 2nd END } UHF Receptacle Plug.

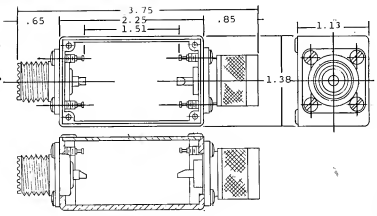



MODEL 2413 QUANTITY DISC. CODE A NET 9.50

NEW

COMPONENT MOUNTING— TYPE "N" RECEPTACLE TO TYPE "N" PLUG

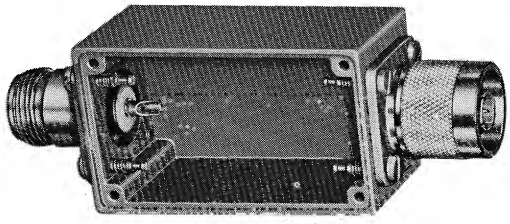

CONN: 1st END } Type "N" Receptacle Jack, UG58A/U.
CONN: 2nd END } Type "N" Receptacle Plug.

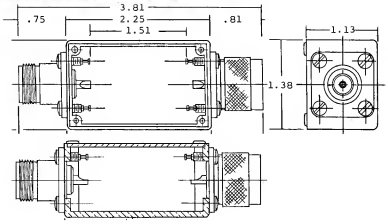



MODEL 2411 QUANTITY DISC. CODE A NET 9.85

NEW

COMPONENT MOUNTING— TYPE "C" RECEPTACLE TO TYPE "C" PLUG

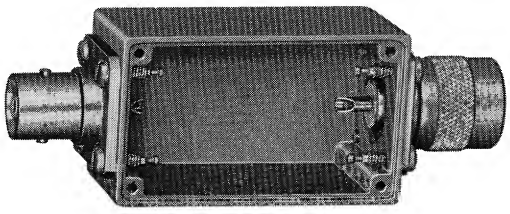

CONN: 1st END } Type "C" Receptacle Jack, UG568/U.
CONN: 2nd END } Type "C" Receptacle Plug.

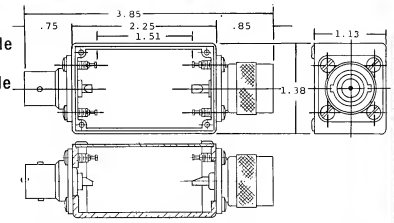



MODEL 2415 QUANTITY DISC. CODE A NET 11.75

NEW

COMPONENT MOUNTING— GR-874 CONNECTOR BOTH ENDS

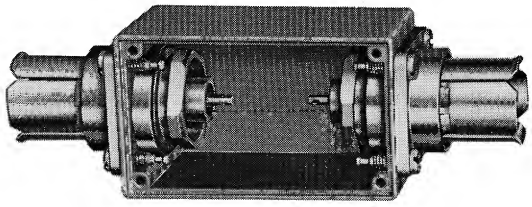

CONN: 1st END } Type GR-874 Connector.
CONN: 2nd END } Type GR-874 Connector.

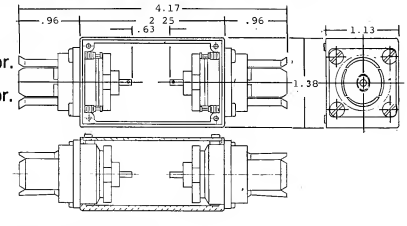



MODEL 2416 QUANTITY DISC. CODE A NET 24.75

MODEL 2417 Above boxes available blank, less connectors. Finish; BLUE per above. Includes cover and mounting screws. QUANTITY DISC. CODE A NET 1.50

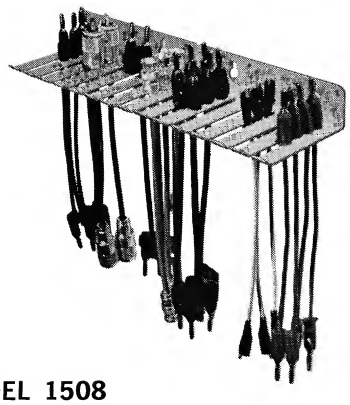

TEST LEAD HOLDER

No need to spend time searching for a particular test lead. With this new rack, all of your patch cords and cable assemblies can be conveniently filed for instant selection—within easy reach. Holder mounts quickly on any vertical surface. Test leads are easy to store, easy to remove. Accepts cables up to .210" in diameter.

MATERIAL: Cold Rolled Steel.
FINISH: Baked Enamel.
COLOR: Orange.

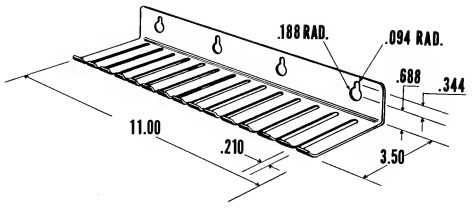

QUANTITY DISC. CODE **A**

MODEL 1508 **NET 2.50**

TEST PROBE TO BNC RECEPTACLE

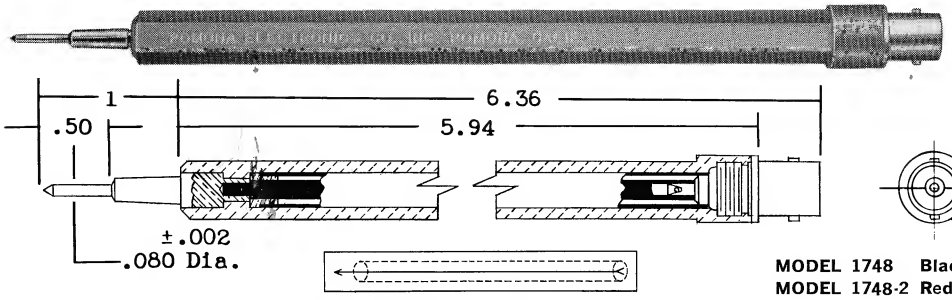

BNC receptacle in handle connected to tip. Permits the use of coaxial cables with BNC plug for circuit testing as a test prod. Tough thermoplastic molded to BNC receptacle and tip.

PIN TIP: .080" dia. x ½" long, brass, nickel plated.
RECEPTACLE: BNC, UG1094/U.

MODEL 1748 Black
MODEL 1748-2 Red

QUANTITY DISC. CODE **A** **NET 4.85**

RETRACTILE (COILED) PATCH CORD—WITH STACK-UP BANANA PLUGS

QUANTITY DISC. CODE **A**

MODEL 2484-36

Permits the use of one size patch cord in place of many various lengths. **BANANA PLUGS:** Spring, one piece beryllium copper heat treated, nickel plated. Tough thermoplastic molded to body and wire. **WIRE:** 20 AWG; Stranding 41 x 36 tinned copper; rubber insulation .145" O.D. **RATED:** 4 A. Cont., 10 A Int./5000 WVDC. **OPERATING TEMP.:** —20°C to +60°C. **COLOR:** Red.

NET 2.95

ALLIGATOR CLIP LEAD TO BANANA PLUG

MODEL	LENGTH	NET
1959-4	4"	.95
1959-8	8"	.95
1959-12	12"	.95
1959-24	24"	.95
1959-36	36"	.95
1959-48	48"	1.00
1959-60	60"	1.05

MODEL 1959 (Specify Color)

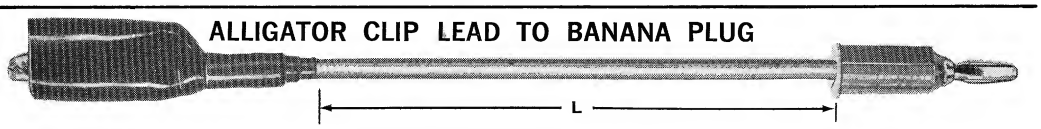

QUANTITY DISC. CODE **A** ★

Adapts to equipment using standard banana jacks.
CLIP: Alligator, steel, cad plated.
BANANA PLUG: Spring, one piece beryllium copper, heat treated, nickel plated. Tough thermoplastic molded to body.

INSULATOR: Red vinyl with red wire. Black on all other colors.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144" O.D.
OPERATING TEMP.: —25°C to +105°C.
COLORS: Black, Red.

Universal Harness

TESTING ADAPTER

Takes the Trouble out of Trouble Shooting!

TEST SOCKET: Extended test tabs, phosphor bronze contacts, heavy duty molded phenolic base with easy-to-read socket connections. **CURRENT MEASUREMENT CONNECTIONS:** Fully insulated, molded .080 phone tip plugs. **INSULATED PLUG:** Fits either shielded or unshielded tube sockets.

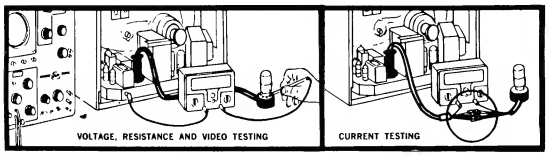

Model 1737 (7 Pin) **Model 1738 (8 Pin)** **Model 1739 (9 Pin)**

QUANTITY DISC. CODE **D** **NET 9.95**

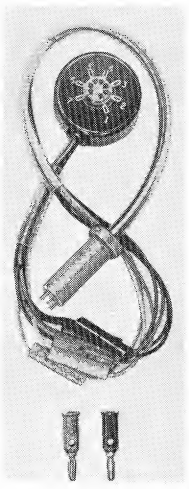

ADAPTER—BNC RECEPTACLE TO SINGLE BANANA PLUG

Permits BNC plug to be used with equipment having banana jacks. Inner conductor connected only. Excellent for adapting laboratory VTVM, oscilloscopes and signal generator inputs to readily available coaxial cables.

UPPER: BNC receptacle, UG1094/U.
LOWER: Single Banana Plug.
COLOR: Black.



QUANTITY DISC. CODE **A**

MODEL 1894 **NET 2.50**

★ **Various lengths may be aggregated for best quantity price.**

TEST PROBE TO BANANA JACK

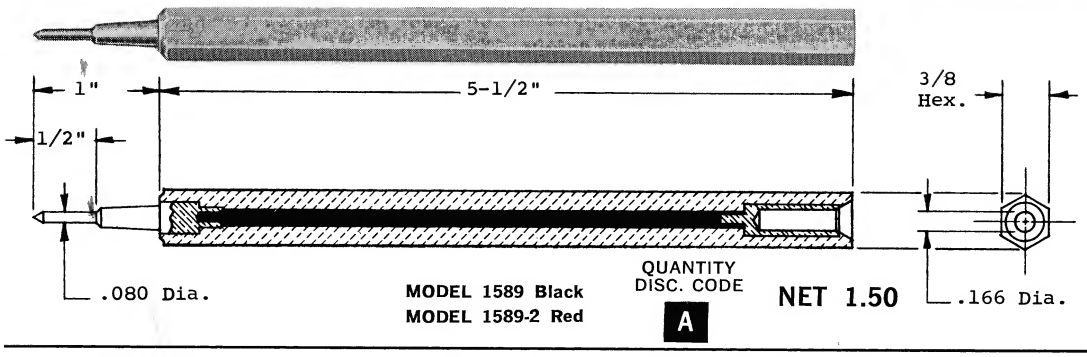

MODEL 1589 Black
MODEL 1589-2 Red

QUANTITY DISC. CODE **A**

NET 1.50

Banana jack in handle connected to tip. Permits use of standard banana plugs for circuit testing as a test prod. Heavy duty insulated handle molded to banana jack and tip.

PIN TIP: .080 dia. x ½" long, brass nickel plated.

BANANA JACK: .166 dia. Brass nickel plated. Accepts standard banana plug.

NEEDLE TIP PROBE TO BANANA JACK

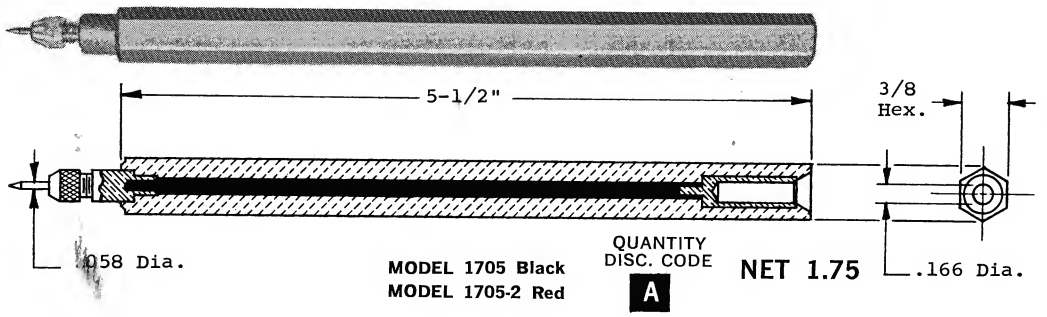

MODEL 1705 Black
MODEL 1705-2 Red

QUANTITY DISC. CODE **A**

NET 1.75

Sharp replaceable needle tip allows testing of encapsulated circuits. Banana jack in handle connected to tip. Permits use of standard banana plugs for circuit testing as a test prod. Heavy duty insulated handle molded to banana jack and tip.

PIN TIP: Replaceable needle tip, steel nickel plated.

BANANA JACK: .166 dia. Brass nickel plated. Accepts standard banana plug.

TEST PROBE TO BANANA PLUG

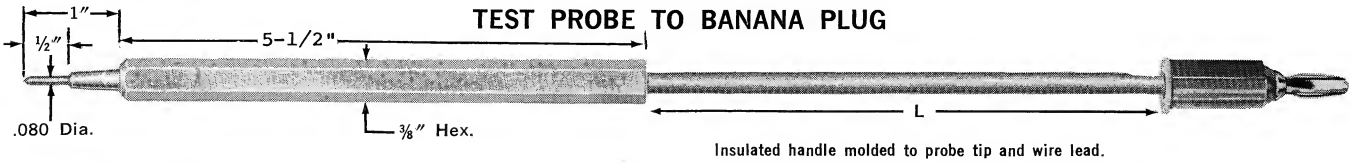

MODEL 1986-48-B	**48" Long**	**Black**	**NET 1.75**
MODEL 1986-48-R	**48" Long**	**Red**	**NET 1.75**

QUANTITY DISC. CODE **A**

Insulated handle molded to probe tip and wire lead.

PROBE PIN TIP: .080 dia. x ½" long. Brass nickel plated.

WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation, .144" O.D.

BANANA PLUG: Spring, one piece beryllium copper, heat treated, nickel plated. Tough thermo-plastic molded to body.

COLORS: Black, Red.

TEST PROBE TO PIN TIP

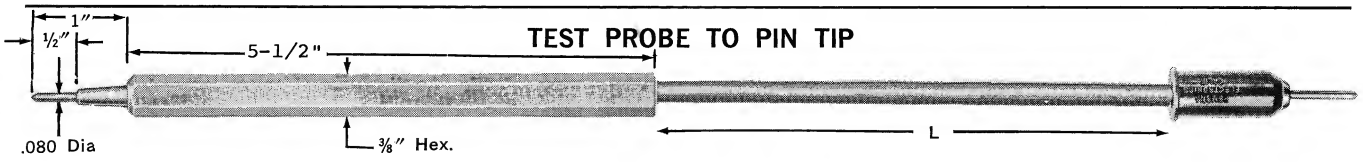

MODEL 1988-48-B	**48" Long**	**Black**	**NET 1.75**
MODEL 1988-48-R	**48" Long**	**Red**	**NET 1.75**

QUANTITY DISC. CODE **A**

Insulated handle molded to probe tip and wire lead.

PROBE PIN TIP: .080 dia. x ½" long. Brass nickel plated.

WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144" O.D.

PIN TIP: .080 dia. x ½" long. Brass nickel plated. Tough thermo-plastic molded to body.

COLORS: Black, Red.

TEST PROBE TO DOUBLE BANANA PLUG

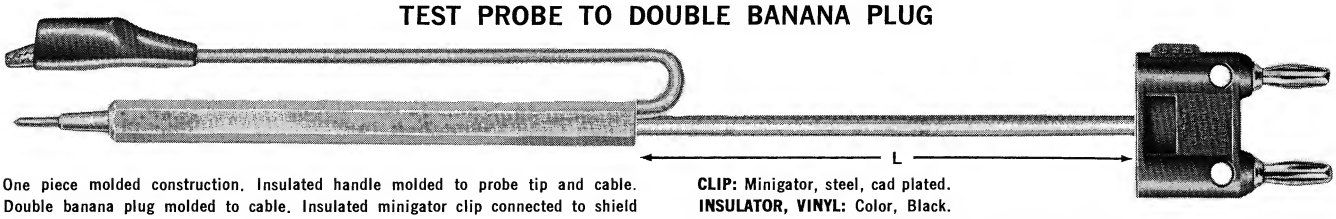

One piece molded construction. Insulated handle molded to probe tip and cable. Double banana plug molded to cable. Insulated minigator clip connected to shield lead.

PROBE PIN TIP: .080 dia. x ½" long. Brass nickel plated.

DOUBLE BANANA PLUG: On ¾" centers. Spring, one piece beryllium copper, heat treated, nickel plated. Tough thermo-plastic molded to double plug body. Color, Gray.

CLIP: Minigator, steel, cad plated.

INSULATOR, VINYL: Color, Black.

CABLE: Shielded microphone cable: Polyethylene insulation. Vinyl jacket. Nom. capacity 25 pf./ft. .205" O.D. Color, Gray.

HANDLE: Color, red, molded of tough thermo-plastic.

MODEL 1569-B-48 .....**48" Long**

QUANTITY DISC. CODE **B**

NET 5.85

OTHER LENGTHS AVAILABLE TO ORDER

INSULATED MINIGATOR CLIP LEAD—18 AWG

MODEL	LENGTH	NET
MG-B-4	4″	.95
MG-B-8	8″	.95
MG-B-12	12″	.95
MG-B-24	24″	.95
MG-B-36	36″	.95
MG-B-48	48″	1.00
MG-B-60	60″	1.05

(Specify Color)

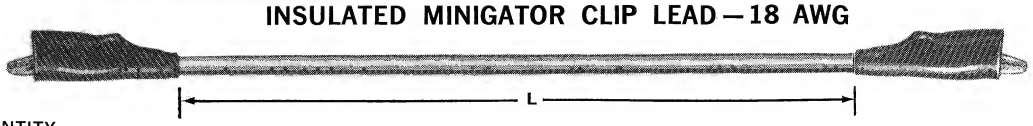

QUANTITY DISC. CODE **A** ★

CLIP: Minigator, steel, cad plated.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144″ O.D.

INSULATOR: Red vinyl with red wire. Black on all other colors.
OPERATING TEMP.: —25°C to +105°C.
COLORS: Black, Red.

INSULATED MINIGATOR CLIP LEAD—20 AWG

MODEL	LENGTH	NET
1236-4	4″	.95
1236-8	8″	.95
1236-12	12″	.95
1236-24	24″	.95
1236-36	36″	.95
1236-48	48″	1.00
1236-60	60″	1.05

(Specify Color)



QUANTITY DISC. CODE **A** ★

CLIP: Minigator, steel, cad. plated.
WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible polyvinyl insulation, .087″ O.D.

INSULATOR: Red Vinyl with Red Wire. Black on all other colors.
OPERATING TEMP.: —25°C to +105°C.
COLORS: Black, Red.

INSULATED MICROGATOR CLIP LEAD—20 AWG

MODEL	LENGTH	NET
1613-4	4″	.95
1613-8	8″	.95
1613-12	12″	.95
1613-24	24″	.95
1613-36	36″	.95
1613-48	48″	1.00
1613-60	60″	1.05

(Specify Color)

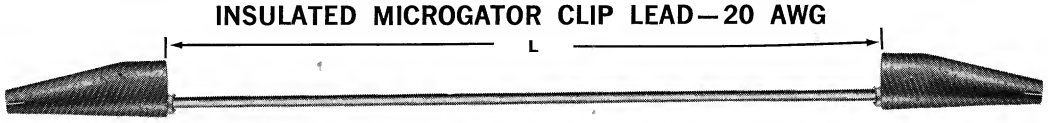

QUANTITY DISC. CODE **A** ★

CLIP: Microgator, solid copper.
WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible polyvinyl insulation, .087″ O.D.

INSULATOR: Red Vinyl with Red Wire. Black on all other colors.
OPERATING TEMP.: —25°C to +105°C.
COLORS: Black, Red.

INSULATED ALLIGATOR CLIP LEAD

MODEL	LENGTH	NET
AL-B-4	4″	.95
AL-B-8	8″	.95
AL-B-12	12″	.95
AL-B-24	24″	.95
AL-B-36	36″	.95
AL-B-48	48″	1.00
AL-B-60	60″	1.05

(Specify Color)



QUANTITY DISC. CODE **A** ★

CLIP: Alligator, steel, cad plated.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144″ O.D.

INSULATOR: Red vinyl with red wire. Black on all other colors.
OPERATING TEMP.: —25°C to +105°C.
COLORS: Black, Red.

INSULATED SPADE LUG JUMPER

MODEL	LENGTH	NET
1743-12	12″	.95
1743-24	24″	.95
1743-36	36″	.95
1743-48	48″	1.00
1743-60	60″	1.05

(Typical Dimensions spade lug)

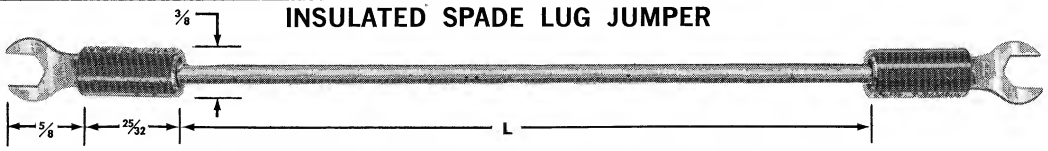

QUANTITY DISC. CODE **A** ★

(Specify Color)

Spade lug heavy duty machined one piece brass. Tough thermo-plastic molded to spade lug body.
SPADE LUGS: Brass 1/16″ thick, nickel plated.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144″ O.D.

RATED: 15 A. Cont., 30 A Int. 10,000 W.V.D.C.
OPERATING TEMP.: —25°C to +105°C.
COLORS: Black, Red, Green, White.

INSULATED SPADE LUG TO BANANA PLUG

MODEL	LENGTH	NET
1987-12	12″	.95
1987-24	24″	.95
1987-36	36″	.95
1987-48	48″	1.00
1987-60	60″	1.05

(Specify Color)



QUANTITY DISC. CODE **A** ★

Spade lug, heavy duty machined one piece brass. Tough thermo-plastic molded to spade lug and banana plug body.
SPADE LUG: Brass 1/16″ thick, nickel plated.
BANANA PLUG: Spring one piece beryllium copper heat treated, nickel plated.

WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144″ O.D.
RATED: 15 A. Cont., 30 A. Int. 10,000 W.V.D.C.
OPERATING TEMP.: —25°C to +105°C.
COLORS: Black, Red, Green, White.

INSULATED SPADE LUG TO PIN TIP

MODEL	LENGTH	NET
1989-12	12″	.95
1989-24	24″	.95
1989-36	36″	.95
1989-48	48″	1.00
1989-60	60″	1.05

(Specify Color)



QUANTITY DISC. CODE **A** ★

Spade lug, heavy duty machined one piece brass. Tough thermo-plastic molded to spade lug and pin tip body.
SPADE LUG: Brass 1/16″ thick, nickel plated.
PIN TIP: .080 dia. 1/2″ long. Brass nickel plated.

WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144″ O.D.
RATED: 5 A. Cont., 10 A. Int. 10,000 W.V.D.C.
OPERATING TEMP.: —25°C to +105°C.
COLORS: Black, Red, Green, White.

INSULATED SPADE LUG TO ALLIGATOR CLIP

MODEL	LENGTH	NET
1960-12	12″	.95
1960-24	24″	.95
1960-36	36″	.95
1960-48	48″	1.00
1960-60	60″	1.05

(Specify Color)



QUANTITY DISC. CODE **A** ★

Spade lug, heavy duty machined one piece brass. Tough thermo-plastic molded to spade lug body.
SPADE LUG: Brass 1/16″ thick, nickel plated.
CLIP: Alligator, steel, cad plated.

INSULATOR: Red vinyl with red wire. Black on all other colors.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144″ O.D.
OPERATING TEMP.: —25°C to +105°C.
COLORS: Black, Red, Green, White.

★ Various lengths may be aggregated for best quantity price.

OTHER LENGTHS AVAILABLE TO ORDER

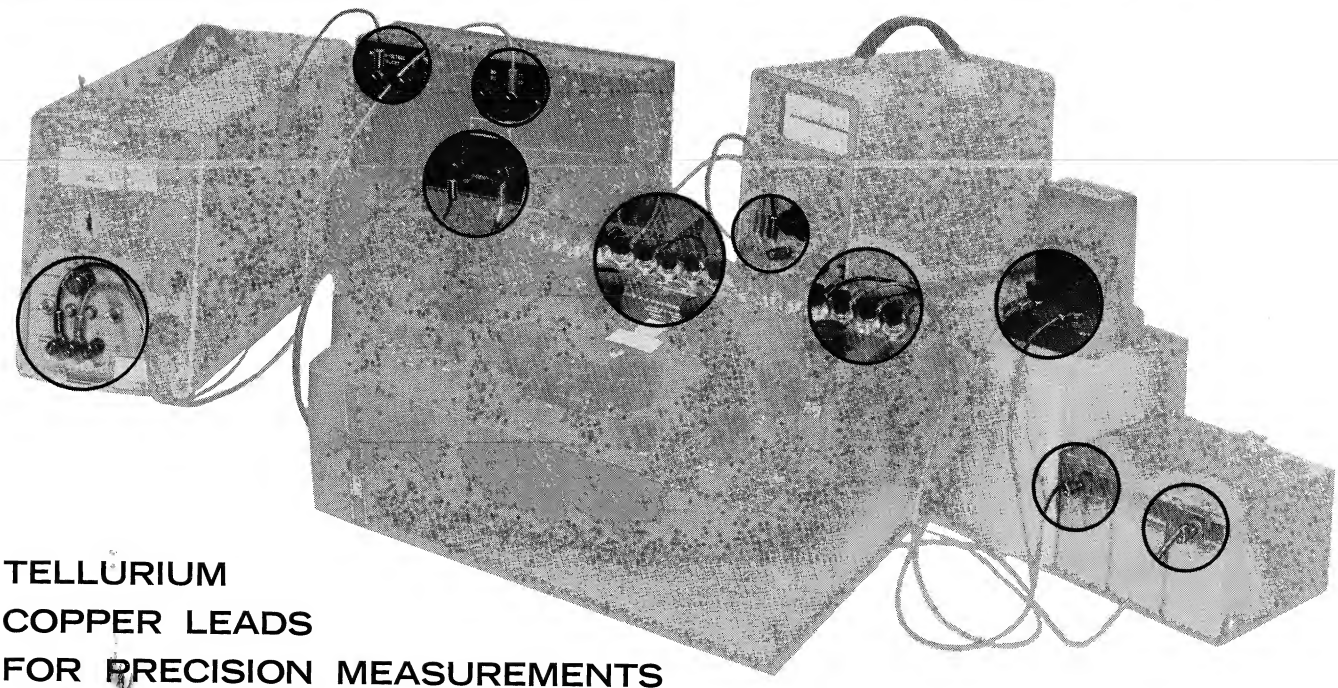

TELLURIUM COPPER LEADS FOR PRECISION MEASUREMENTS

POMONA ELECTRONICS has advanced the state of the art in measurements where Thermoelectric Effects are significant sources of error. Comparators designed for use with the Kelvin-Varley voltage divider and microvolt leads were tested with Primary Standards Laboratory equipment.
Thermoelectric voltages were not detected until the most sensitive galvanometer range was used.

THERMOELECTRIC PROPERTIES—Tellurium copper gold plated spade lugs cold-staked to multi-stranded 12 gauge COPPER wire minimize thermoelectric effects—an absolute necessity for low voltage, high precision measurements.

LOW RESISTANCE—12 gauge multi-stranded COPPER wire results in extremely low cable resistance. Spade lugs plated with 50 micro inches gold for minimum contact resistance and minimum thermal EMF when using copper binding posts. (Less than 0.01 $\mu v/c^{\circ}$).

TELLURIUM COPPER SPADE LUGS, SHIELDED LEAD

MODEL	LENGTH
1756-24	24″
1756-48	48″

MODEL 1756
(Specify Length)

★ QUANTITY DISC. CODE **A**

NET 9.85

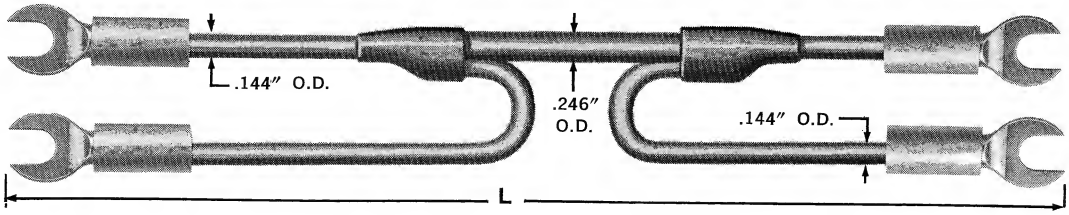

Designed for use with Kelvin Varley voltage dividers where extreme precision is required for low voltage measurements. Features guard shield to effectively reduce shunt resistance. Tough thermo-plastic molded to spade lug body, color; center conductor lug red, shield lug black. Tellurium copper heavy duty one piece machined spade lug gold plated per MIL-G-45204, Type II, Class I. Center conductor 12 AWG multi-stranded bare copper, shield lead wire, 18 AWG, stranded. Polyethylene primary insulation. Braided shield bare copper. Polyvinyl jacket, color black, per MIL-C-17C Type IIA.

TELLURIUM COPPER SPADE LUG JUMPER

MODEL	LENGTH	NET
1693-12	12″	2.50
1693-18	18″	2.50
1693-24	24″	2.50
1693-36	36″	2.50
1693-48	48″	2.55
1693-60	60″	2.60

MODEL 1693 (Specify Color)

★QUANTITY DISC. CODE **A**

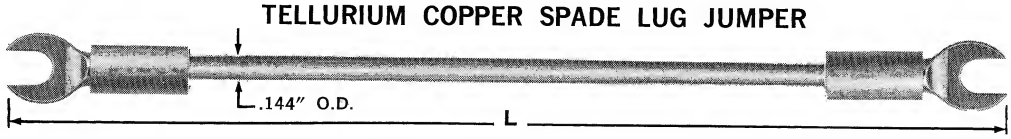

Single conductor tellurium copper spade lug jumper used in applications where guard shield is not required. Tough thermo-plastic molded to spade lug body. Color matches wire. Tellurium Copper heavy duty one piece machined spade lug gold plated per MIL-G-45204. Type II, Class I. Conductor, 12 AWG multi-stranded bare copper. Insulation polyvinyl, 105°C, .144″ O.D.
COLORS: Black, Red, Green.

★ Various lengths may be aggregated for best quantity price.

POMONA BANANA PLUG PATCH CORDS

Tough thermoplastic insulation molds the plug and leads into a strong moisture resistant integral unit. Excellent for computer board and test equipment applications. Used by leading industries in applications where extreme reliability is of prime importance.

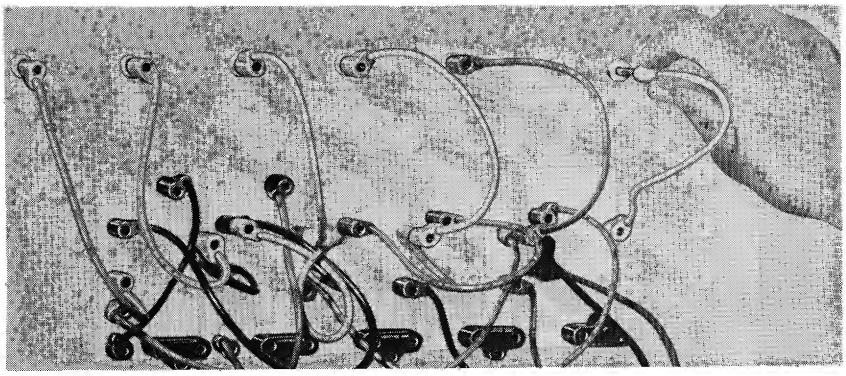

FEATURES

- One piece beryllium copper heat treated spring for maximum long life.
- Rounded spring design results in maximum contact area.
- Extra flexible polyvinyl insulation used on all leads.

SPECIFICATIONS

- Fits standard 0.166 dia. banana jacks.
- Spring, beryllium copper alloy 25 per QQ-C-533.
- Plug body, brass per QQ-B-626, Comp. 22.
- Nickel plated per QQ-N-290, Class 2.
- Contact resistance less than 0.001 ohms per banana plug.
- Operating Temp.: −0°C to +105°C.
- Wire, 18 AWG, stranding 65 x 36 T.C.
- Insulation, polyvinyl .144″ O.D.
- Ratings: 15 A. Cont., 30 A. Int. 10,000 W.V.D.C.

STACK-UP BANANA PLUG PATCH CORD

MODEL	LENGTH	NET
B-4	4″	1.50
B-8	8″	1.50
B-12	12″	1.50
B-18	18″	1.50
B-24	24″	1.50
B-36	36″	1.50
B-48	48″	1.55
B-60	60″	1.60

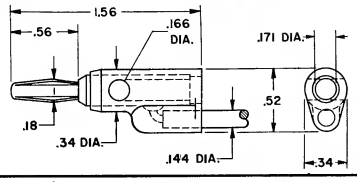

Multiple stacking feature accommodates the most complex stacking; keeps circuitry neater. Greatly simplifies circuit connections and changes. Reliable solder-bonded connections withstand pull test in excess of 50 lbs. Banana plugs both ends.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.



MODEL B (Specify Color) QUANTITY DISC. CODE **A** ★

EXTENSION STACKING BANANA PLUG PATCH CORD

MODEL	LENGTH	NET
HB-4	4″	1.75
HB-8	8″	1.75
HB-12	12″	1.75
HB-18	18″	1.75
HB-24	24″	1.75
HB-36	36″	1.75
HB-48	48″	1.80
HB-60	60″	1.85



Dual purpose. Insulates all hot leads when used as an extension cord. Endless extension couplings possible with any banana plug patch cord. Provides vertical stacking from any jack. Reliable solder-bonded connections withstand pull test in excess of 50 lbs. Banana plugs both ends.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.



MODEL HB (Specify Color) QUANTITY DISC. CODE **A** ★

MODEL	LENGTH	NET
1440-4	4″	1.00
1440-8	8″	1.00
1440-12	12″	1.00
1440-18	18″	1.00
1440-24	24″	1.00
1440-36	36″	1.00
1440-48	48″	1.05
1440-60	60″	1.10



HORIZONTAL STACKING BANANA PLUG PATCH CORD

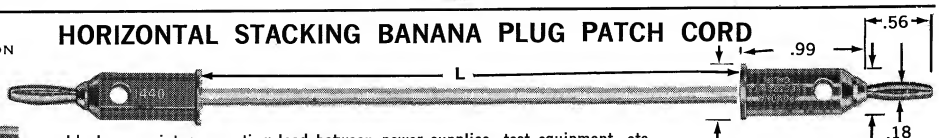

Ideal as an interconnecting lead between power supplies, test equipment, etc. Horizontal stacking feature. Banana plugs on both ends.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL 1440 (Specify Color) QUANTITY DISC. CODE **A** ★

MODEL	LENGTH	NET
1985-4	4″	.85
1985-8	8″	.85
1985-12	12″	.85
1985-18	18″	.85
1985-24	24″	.85
1985-36	36″	.85
1985-48	48″	.90
1985-60	60″	.95

BANANA PLUG PATCH CORD



Excellent for general lab work. Permits interconnection between test instruments, etc. Banana plugs both ends.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL 1985 (Specify Color) QUANTITY DISC. CODE **A** ★

★ Various lengths may be aggregated for best quantity price.

OTHER LENGTHS AVAILABLE TO ORDER

PIN TIP VERTICAL STACKING PATCH CORD

MODEL	LENGTH	NET
P-4	4″	1.75
P-8	8″	1.75
P-12	12″	1.75
P-18	18″	1.75
P-24	24″	1.75
P-36	36″	1.75
P-48	48″	1.80
P-60	60″	1.85

MODEL P
(Specify Color)


STACK-UP

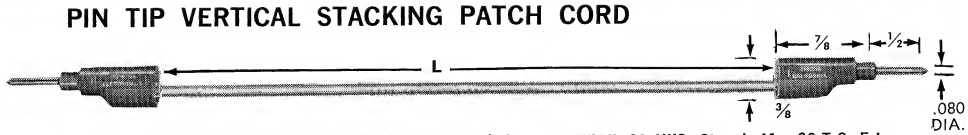

A must in circuit designing and testing, with instruments that utilize tip jacks.
PIN TIP: .080 dia., ½″ long, brass, gold flashed.
TIP JACK, STACK-UP: Beryllium copper, gold flashed. Accepts .080 dia. pin.

★QUANTITY DISC. CODE **A**

WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible polyvinyl insulation .087″ O.D.
RATED: 5 A. Cont., 10 A. Int. 5,000 W.V.D.C.
OPERATING TEMP.: —0°C to +105°C.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

PIN TIP EXTENSION STACKING PATCH CORD

MODEL	LENGTH	NET
1727-4	4″	1.85
1727-8	8″	1.85
1727-12	12″	1.85
1727-18	18″	1.85
1727-24	24″	1.85
1727-36	36″	1.85
1727-48	48″	1.90
1727-60	60″	1.95

MODEL 1727
(Specify Color)

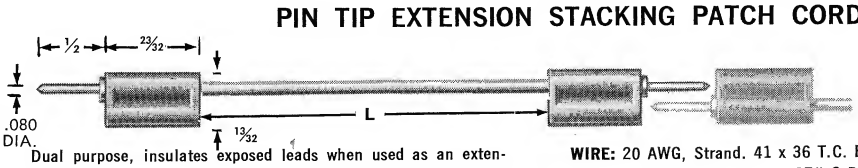



Dual purpose, insulates exposed leads when used as an extension cord. Endless extension coupling possible. Also provides stacking from .080 jack.
PIN TIP: .080 dia., ½″ long, brass, gold flashed.
TIP JACK: Beryllium copper, gold flashed. Accepts .080 dia. pin.

★QUANTITY DISC. CODE **A**

WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible polyvinyl insulation .087″ O.D.
RATED: 5 A. Cont., 10 A. Int. 5,000 W.V.D.C.
OPERATING TEMP.: —0°C to +105°C.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

PIN TIP PATCH CORD

MODEL	LENGTH	NET
1990-4	4″	.75
1990-8	8″	.75
1990-12	12″	.75
1990-18	18″	.75
1990-24	24″	.75
1990-36	36″	.75
1990-48	48″	.80
1990-60	60″	.85

MODEL 1990
(Specify Color)

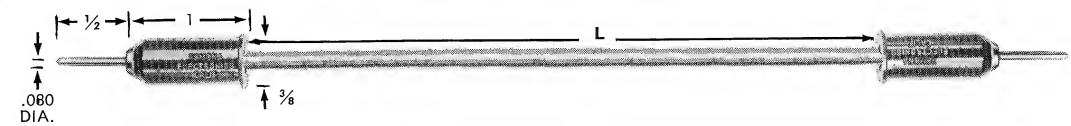

QUANTITY DISC. CODE **A** ★

Heavy Duty patch cord. Excellent for general lab work. Permits interconnection between test instruments that utilize tip jacks.
PIN TIP: .080 dia., ½″ long, brass, nickel plated.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144″ O.D.

RATED: 5 A. Cont., 10 A. Int. 10,000 W.V.D.C.
OPERATING TEMP.: —0°C to +105°C.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

PIN TIP PATCH CORD

MODEL			LENGTH	NET
PT063-4	PT080-4	PM080-4	4″	.85
PT063-8	PT080-8	PM080-8	8″	.85
PT063-12	PT080-12	PM080-12	12″	.85
PT063-18	P8080-18	PM080-18	18″	.85
PT063-24	PT080-24	PM080-24	24″	.85
PT063-36	PT080-36	PM080-36	36″	.85
PT063-48	PT080-48	PM080-48	48″	.90
PT063-60	PT080-60	PM080-60	60″	.95

MODEL PT & PM
(Specify Color)

Small body style permits usage in equipment having receptacles spaced closely together. Three models shown.

PIN TIP: Brass, gold flashed.
WIRE: 22 AWG, Strand. 19 x 34 T.C. Insulation, polyvinyl .064″ O.D.
RATED: 3 A. Cont., 7.5 A. Int. 1,000 W.V.D.C.
OPERATING TEMP.: —0°C to +105°C.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

★QUANTITY DISC. CODE **A**

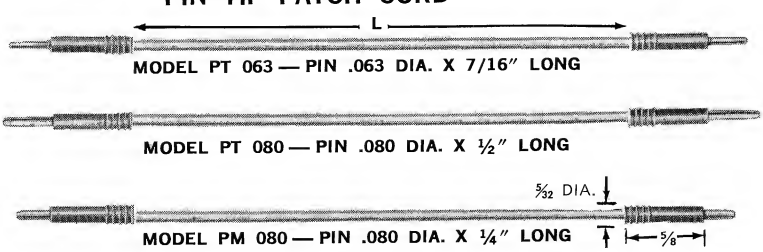

BANANA PLUG TO PIN TIP STACK-UP PATCH CORD

★QUANTITY DISC. CODE **A**

Adapts to equipment using banana jacks and pin jacks. Banana plug and pin tip allow vertical stack-up.

MODEL	LENGTH	NET
1126-4	4″	1.75
1126-8	8″	1.75
1126-12	12″	1.75
1126-18	18″	1.75
1126-24	24″	1.75
1126-36	36″	1.75
1126-48	48″	1.80
1126-60	60″	1.85

MODEL 1126
(Specify Color)


SIDE CONNECTION



STACK-UP

BANANA PLUG: Spring, one piece beryllium copper, heat treated, nickel plated.
PIN TIP: .080 dia. ½″ long, brass, gold flashed.

TIP JACK, STACK-UP: Beryllium copper, gold flashed. Accepts .080 Dia. pin.
WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible polyvinyl insulation .087″ O.D.
RATED: 5 A. Cont., 10 A. Int. 5,000 W.V.D.C.
OPERATING TEMP.: —0°C to +105°C.
COLORS: Black, Red.

★ Various lengths may be aggregated for best quantity price.

OTHER LENGTHS AVAILABLE TO ORDER

POMONA MOLDED DOUBLE BANANA PLUG PATCH CORDS AND TEST LEADS

. . . indispensable for bridge transformer connections, three terminal capacitor measurements and general hook-up for two wire systems. They are horizontally and vertically stackable in parallel.

Tough thermo-plastic material molded to plug body and cable insures maximum strength, moisture resistance and excellent insulative properties.

Used by leading industries in applications where extreme reliability is of prime importance.

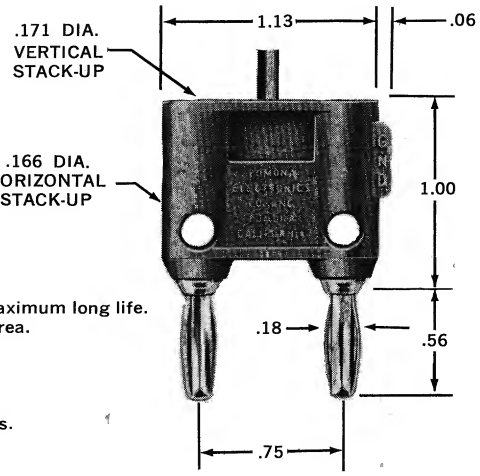

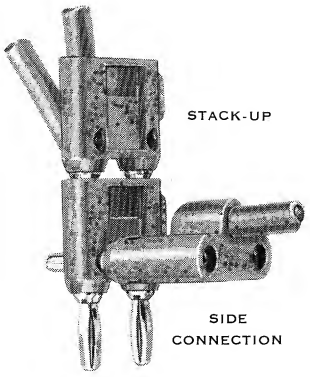

FEATURES . . .

- One piece beryllium copper heat treated spring for maximum long life.
- Rounded spring design results in maximum contact area.
- GND., clearly molded on plug body and shell.
- Solder-bonded noise-free connections.

SPECIFICATIONS . . .

- Fits standard 0.166 dia. banana jacks, on ¾" centers.
- Contact resistance less than 0.001 ohms per plug.
- Spring beryllium copper alloy 25 per QQ-C-533.
- Plug body brass per QQ-B-626, Comp. 22.
- Nickel plated per QQ-N-290, Class 2.

CABLE TYPE DESCRIPTION

TWO COND. TWISTED PAIR
18 AWG, Strand. 65 x 36 T.C. Vinyl insulation. Vinyl jacket, .250" O.D. Nom. Cap. 30 pf/ft.
COLOR: Gray.

SHIELDED MICROPHONE CABLE
Polyethylene insulation. Vinyl jacket, .205" O.D. Nom. Cap. 25 pf/ft.
COLOR: Gray.

SHIELDED COAXIAL CABLE
RG58C/U Polyethylene insulation. Vinyl jacket, .195" O.D. Nom. Cap. 28.5 pf/ft. **COLOR:** Black.

DOUBLE PLUG BOTH ENDS*

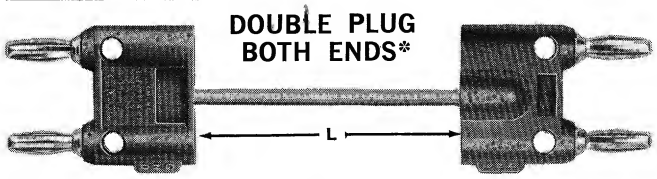

TWO COND. TWISTED PR.	SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
2BA-18	2BB-18	2BC-18	18"	4.85
2BA-24	2BB-24	2BC-24	24"	4.85
2BA-30	2BB-30	2BC-30	30"	4.85
2BA-36	2BB-36	2BC-36	36"	4.85
2BA-48	2BB-48	2BC-48	48"	5.00
2BA-60	2BB-60	2BC-60	60"	5.15

★ QUANTITY DISC. CODE **B**

TWO COND. SHIELDED BALANCED LINE

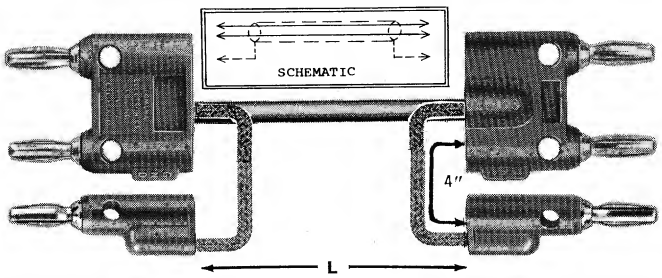

CABLE DESCRIPTION	MODEL	LENGTH	NET
2-Cond. shielded mic. cable. Polyethylene insulation. Vinyl jacket, .231" O.D. Nom. Cap. between cond. 18 pf./ft. Nom. Cap. between one cond. and remaining cond. connected to shield, 32 pf./ft. COLOR: Cable and double plug, Gray. Single ground plug, Green.	1167-18	18"	7.85
	1167-24	24"	7.85
	1167-30	30"	7.85
	1167-36	36"	7.85
	1167-48	48"	8.10
	1167-60	60"	8.35

★ QUANTITY DISC. CODE **B**

SHIELDED DOUBLE PLUG BOTH ENDS

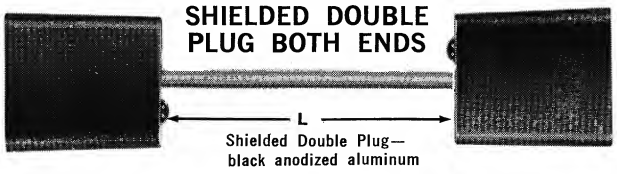

Shielded Double Plug—black anodized aluminum

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1550-B-18	1550-C-18	18"	5.85
1550-B-24	1550-C-24	24"	5.85
1550-B-30	1550-C-30	30"	5.85
1550-B-36	1550-C-36	36"	5.85
1550-B-48	1550-C-48	48"	6.00
1550-B-60	1550-C-60	60"	6.15

★ QUANTITY DISC. CODE **B**

DOUBLE PLUG TO SINGLE BANANA PLUGS

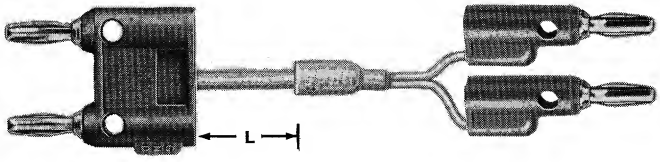

CABLE DESCRIPTION		MODEL	LENGTH	NET
TWO COND. TWISTED PAIR	18 AWG, Strand. 65 x 36 T.C. Vinyl insulation. Vinyl jacket, .250" O.D. Nom. Cap. 30 pf/ft. **COLOR:** Double Plug: Gray Single Plugs: Red, Black	1368-18	18"	5.85
		1368-24	24"	5.85
		1368-30	30"	5.85
		1368-36	36"	5.85
		1368-48	48"	6.00
		1368-60	60"	6.15

★ QUANTITY DISC. CODE **B**

***NOTE:** Molded double plug matches color of cable.
Two cond. Twisted pair, GRAY. Shielded mic. cable, GRAY.
Coaxial RG58C/U Cable, BLACK.

★ Various lengths may be aggregated for best quantity price.

1. Other cable colors available to order on the Two Cond. Twisted Pair and Shielded Mic. cable models with plug to match.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.
2. Other lengths and cable types available to order.

PATCH CORDS
BNC CONNECTING LEADS

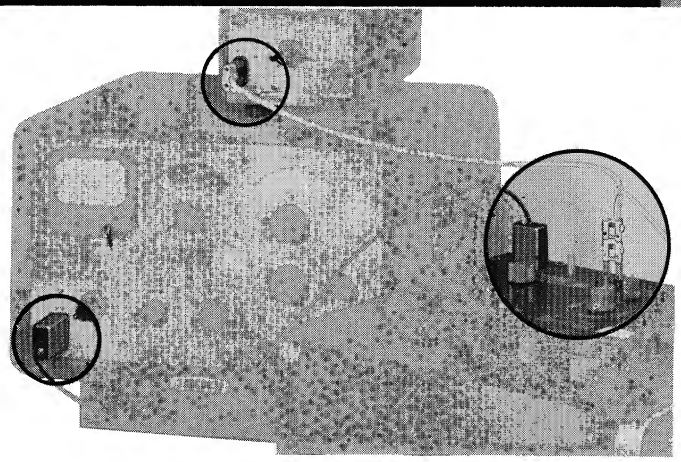

Standard video and RF connecting leads available in both shielded microphone and shielded coaxial cables. Designed to meet rigid industrial and military applications. Reliable solder-bonded connections minimize noise.

Pomona Electronics cable assemblies and patch cords are used in applications where extreme reliability is of prime importance.

CABLE TYPES

SHIELDED MICROPHONE CABLE	Polyethylene insulation, Vinyl jacket, .205″ O.D. Nom. Cap. 25 pf.ft. COLOR: Gray.
SHIELDED COAXIAL CABLE	RG58C/U Polyethylene insulation, Vinyl jacket, .195″ O.D. Nom. Cap. 28.5 pf./ft. COLOR: Black.
TWO COND. TWISTED PAIR	18 AWG, Strand. 65 x 36 T.C. vinyl insulation, vinyl jacket, .250″ O.D. Nom. Cap. 30 pf/ft. Color: Gray.

BNC MALE BOTH ENDS



CONN.: 1ST END } UG88E/U, Male BNC — **CABLE:** Shielded Mic. or Shielded Coax, RG58C/U. — **CONN.:** 2ND END } UG88E/U, Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
BNC-B-18	BNC-C-18	18″	5.85
BNC-B-24	BNC-C-24	24″	5.85
BNC-B-30	BNC-C-30	30″	5.85
BNC-B-36	BNC-C-36	36″	5.85
BNC-B-48	BNC-C-48	48″	6.00
BNC-B-60	BNC-C-60	60″	6.15

★QUANTITY DISC. CODE **B**

RIGHT ANGLE BNC TO BNC MALE

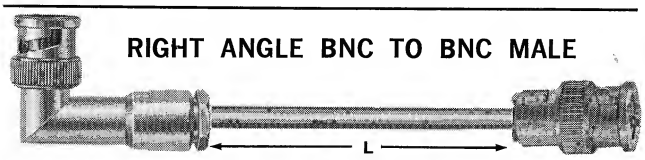

CONN.: 1ST END } UG913A/U, Angle Male BNC — **CABLE:** Shielded Mic. or Shielded Coax, RG58C/U. — **CONN.:** 2ND END } UG88C/U, Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1383-B-18	1383-C-18	18″	7.85
1383-B-24	1383-C-24	24″	7.85
1383-B-30	1383-C-30	30″	7.85
1383-B-36	1383-C-36	36″	7.85
1383-B-48	1383-C-48	48″	8.00
1383-B-60	1383-C-60	60″	8.15

★QUANTITY DISC. CODE **B**

UHF MALE TO BNC MALE



CONN.: 1ST END } PL259, UHF Male — **CABLE:** Shielded Mic. or Shielded Coax, RG58C/U. — **CONN.:** 2ND END } UG88C/U, Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1367-B-18	1367-C-18	18″	5.85
1367-B-24	1367-C-24	24″	5.85
1367-B-30	1367-C-30	30″	5.85
1367-B-36	1367-C-36	36″	5.85
1367-B-48	1367-C-48	48″	6.00
1367-B-60	1367-C-60	60″	6.15

★QUANTITY DISC. CODE **B**

CRIMP BNC MALE BOTH ENDS



CONN.: 1ST END } Crimp Male BNC (Comparable to UG88E/U) — **CABLE:** Shielded Coax, RG58C/U — **CONN.:** 2nd END } Crimp Male BNC (Comparable to UG88E/U)

CABLE DESCRIPTION:	MODEL	LENGTH	NET
Shielded coax., RG58C/U, Polyethylene Insulation. Vinyl Jacket, .195″ O.D., Nom. Cap. 28.5 pf/ft.	2249-C-12	12″	3.85
	2249-C-24	24″	3.85
	2249-C-36	36″	3.85
	2249-C-48	48″	4.00
	2249-C-60	60″	4.15

★QUANTITY DISC. CODE **B**

DOUBLE BANANA PLUG TO BNC MALE

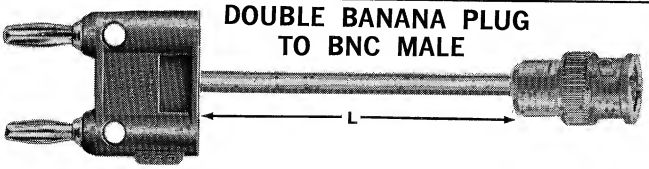

CONN.: 1ST END } Double Banana Plug, on ¾″ Centers. — **CABLE:** Shielded Mic. or Shielded Coax, RG58C/U. — **CONN.:** 2ND END } UG88C/U, Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
2BB-BNC-18	2BC-BNC-18	18″	5.85
2BB-BNC-24	2BC-BNC-24	24″	5.85
2BB-BNC-30	2BC-BNC-30	30″	5.85
2BB-BNC-36	2BC-BNC-36	36″	5.85
2BB-BNC-48	2BC-BNC-48	48″	6.00
2BB-BNC-60	2BC-BNC-60	60″	6.15

★QUANTITY DISC. CODE **B**

RIGHT ANGLE BNC MALE BOTH ENDS

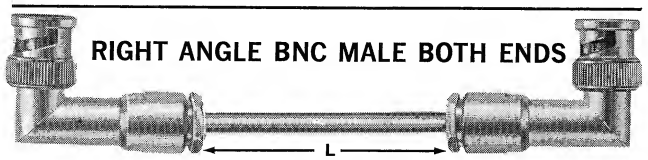

CONN.: 1ST END } UG913A/U, Angle Male BNC — **CABLE:** Shielded Mic. or Shielded Coax, RG58C/U. — **CONN.:** 2ND END } UG913A/U, Angle Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1155-B-18	1155-C-18	18″	10.85
1155-B-24	1155-C-24	24″	10.85
1155-B-30	1155-C-30	30″	10.85
1155-B-36	1155-C-36	36″	10.85
1155-B-48	1155-C-48	48″	11.00
1155-B-60	1155-C-60	60″	11.15

★QUANTITY DISC. CODE **B**

SHIELDED DOUBLE PLUG TO BNC MALE

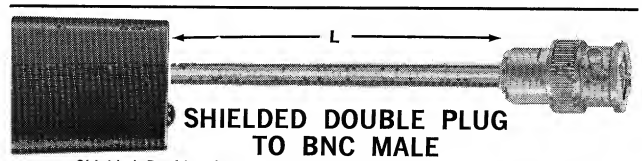

CONN.: 1ST END } Shielded Double plug, on ¾″ centers. Black anodized aluminum. — **CABLE:** Shielded Mic. or Shielded Coax, RG58C/U. — **CONN.:** 2ND END } UG88C/U, Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1555-B-18	1555-C-18	18″	6.85
1555-B-24	1555-C-24	24″	6.85
1555-B-30	1555-C-30	30″	6.85
1555-B-36	1555-C-36	36″	6.85
1555-B-48	1555-C-48	48″	7.00
1555-B-60	1555-C-60	60″	7.15

★QUANTITY DISC. CODE **B**

★ Various lengths may be aggregated for best quantity price.

OTHER LENGTHS AND CABLE TYPES AVAILABLE TO ORDER

PATCH CORDS CONNECTING LEADS

BNC MALE TO SINGLE BANANA PLUGS

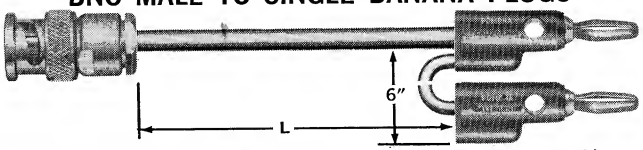

CONN: 1st END: UG88E/U Male BNC — **CABLE:** Shielded Coax., RG58C/U — **CONN:** 2nd END: Single Banana Plugs, Color: 1 Black, 1 Red.

CABLE DESCRIPTION:	MODEL	LENGTH	NET
Shielded coax., RG58C/U, Polyethylene Insulation. Vinyl jacket, .195" O.D. Nom. Cap. 28.5 pf/ft.	2241-C-18	18"	5.85
	2241-C-24	24"	5.85
	2241-C-36	36"	5.85
	2241-C-48	48"	6.00

★ QUANTITY DISC. CODE **B**

BNC MALE TO GR-874

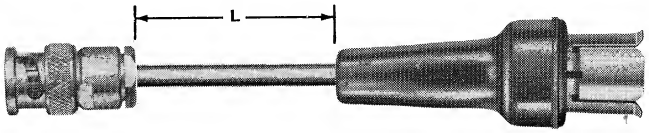

CONN: 1st END: UG88E/U Male BNC — **CABLE:** Shielded Coax., RG58C/U — **CONN:** 2nd END: GR-874

CABLE DESCRIPTION:	MODEL	LENGTH	NET
Shielded coax., RG58C/U, Polyethylene Insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.	1703-C-24	24"	9.85
	1703-C-36	36"	9.85
	1703-C-48	48"	10.00

★ QUANTITY DISC. CODE **B**

BNC MALE TO SERIES "N" MALE

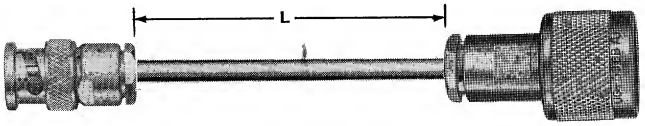

CONN: 1st END: UG88E/U Male BNC — **CABLE:** Shielded coax., RG58C/U — **CONN:** 2nd END: UG536B/U "N" Male

CABLE DESCRIPTION:	MODEL	LENGTH	NET
Shielded coax., RG58C/U, Polyethylene Insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.	1366-C-24	24"	6.85
	1366-C-36	36"	6.85
	1366-C-48	48"	7.00

★ QUANTITY DISC. CODE **B**

BNC MALE TO BNC FEMALE



CONN: 1st END: UG88E/U Male BNC — **CABLE:** Shielded coax., RG58C/U — **CONN:** 2nd END: UG89C/U Female BNC

CABLE DESCRIPTION:	MODEL	LENGTH	NET
Shielded Coax., RG58C/U, Polyethylene Insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.	2223-C-12	12"	6.85
	2223-C-24	24"	6.85
	2223-C-36	36"	6.85
	2223-C-48	48"	7.00
	2223-C-60	60"	7.15

★ QUANTITY DISC. CODE **B**

BNC FEMALE BOTH ENDS



CONN: 1st END: UG89C/U Female BNC — **CABLE:** Shielded Coax., RG58C/U — **CONN:** 2nd END: UG89C/U Female BNC

CABLE DESCRIPTION:	MODEL	LENGTH	NET
Shielded coax., RG58C/U, Polyethylene Insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.	1808-C-12	12"	6.85
	1808-C-24	24"	6.85
	1808-C-36	36"	6.85
	1808-C-48	48"	7.00
	1808-C-60	60"	7.15

★ QUANTITY DISC. CODE **B**

TNC MALE BOTH ENDS



CONN: 1st END: Male TNC — **CABLE:** Shielded coax., RG58C/U — **CONN:** 2nd END: Male TNC

CABLE DESCRIPTION	MODEL	LENGTH	NET
Shielded coax., RG58C/U, Polyethylene Insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.	1944-C-12	12"	7.85
	1944-C-24	24"	7.85
	1944-C-36	36"	7.85
	1944-C-48	48"	8.00
	1944-C-60	60"	8.15

★ QUANTITY DISC. CODE **B**

DOUBLE PLUG BALANCED LINE TO PJ-068

CONN: 1st END: Double and Single Banana Plug — **CABLE:** 2 Cond. Shielded Microphone — **CONN:** 2nd END: PJ-068 Plug

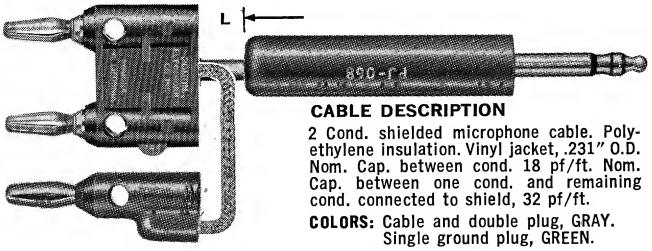

CABLE DESCRIPTION

2 Cond. shielded microphone cable. Polyethylene insulation. Vinyl jacket, .231" O.D. Nom. Cap. between cond. 18 pf/ft. Nom. Cap. between one cond. and remaining cond. connected to shield, 32 pf/ft.

COLORS: Cable and double plug, GRAY. Single ground plug, GREEN.

MODEL	LENGTH	NET	QUANTITY DISC. CODE
2174-36	36"	9.85	**B**

DOUBLE PLUG TO GR-874

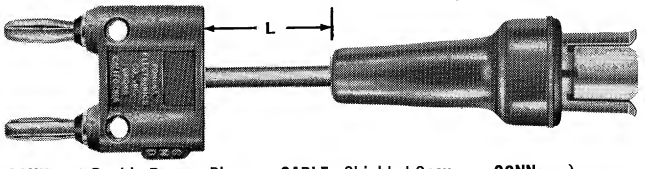

CONN: 1st END: Double Banana Plug, on ¾" Centers. — **CABLE:** Shielded Coax., RG58C/U — **CONN:** 2nd END: GR-874

CABLE DESCRIPTION	MODEL	LENGTH	NET
Shielded coax., RG58C/U, Polyethylene Insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.	2243-C-24	24"	9.50
	2243-C-36	36"	9.50
	2243-C-48	48"	9.65

COLOR: Cable and double plug, Black. ★ QUANTITY DISC. CODE **B**

DOUBLE PLUG TO SINGLE PIN TIPS

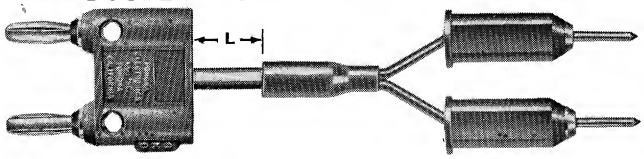

CONN: 1st END: Double Banana Plug, on ¾" Centers. — **CABLE:** Two Cond. Twisted Pair — **CONN:** 2nd END: Single Pin Tip Plugs, .080 Dia. Color: 1 Black, 1 Red

CABLE DESCRIPTION	MODEL	LENGTH	NET
Two Cond. Twisted pair. 18 AWG, Strand. 65 x 36 T.C. Vinyl insulation, vinyl jacket, .250" O.D. Nom. Cap. 30 pf/ft.	2184-A-24	24"	4.85
	2184-A-36	36"	4.85
	2184-A-48	48"	5.00

COLOR: Cable and Double plug, Gray. ★ QUANTITY DISC. CODE **B**

DOUBLE PLUG TO STACK-UP PIN TIPS

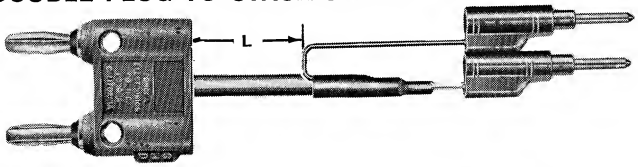

CONN: 1st END: Double Banana Plug, on ¾" Centers. — **CABLE:** Shielded Coax., RG58C/U — **CONN:** 2nd END: Single Stack-Up Pin Tip Plugs, .080 Dia. Color: 1 Black, 1 Red.

CABLE DESCRIPTION	MODEL	LENGTH	NET
Shielded coax., RG58C/U, Polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.	2BC-PP-18	18"	7.50
	2BC-PP-24	24"	7.50
	2BC-PP-36	36"	7.50
	2BC-PP-48	48"	7.65

COLOR: Cable and Double Plug, Black. ★ QUANTITY DISC. CODE **B**

★ Various lengths may be aggregated for best quantity price.

OTHER LENGTHS AVAILABLE TO ORDER

ALLIGATOR CLIPS TO BNC MALE

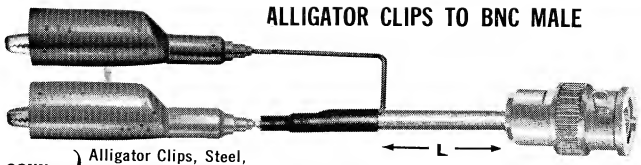

CONN.: 1ST END Alligator Clips, Steel, cad plated. Insulators, Vinyl: Black/Red.
CABLE: Shielded Mic. or Shielded Coax, RG58C/U.
CONN.: 2ND END UG88C/U, BNC, Male.

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
AL-B-BNC-18	AL-C-BNC-18	18″	5.85
AL-B-BNC-24	AL-C-BNC-24	24″	5.85
AL-B-BNC-30	AL-C-BNC-30	30″	5.85
AL-B-BNC-36	AL-C-BNC-36	36″	5.85
AL-B-BNC-48	AL-C-BNC-48	48″	6.00
AL-B-BNC-60	AL-C-BNC-60	60″	6.15

★ QUANTITY DISC. CODE **B**

MINIGATOR CLIPS TO BNC MALE

CONN.: 1ST END Minigator Clips, Steel, cad plated Insulators, Vinyl: Black/Red.
CABLE: Shielded Mic. or Shielded Coax, RG58C/U.
CONN.: 2ND END UG88C/U, BNC, Male

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
MG-B-BNC-18	MG-C-BNC-18	18″	5.85
MG-B-BNC-24	MG-C-BNC-24	24″	5.85
MG-B-BNC-30	MG-C-BNC-30	30″	5.85
MG-B-BNC-36	MG-C-BNC-36	36″	5.85
MG-B-BNC-48	MG-C-BNC-48	48″	6.00
MG-B-BNC-60	MG-C-BNC-60	60″	6.15

★ QUANTITY DISC. CODE **B**

ALLIGATOR CLIPS TO DOUBLE BANANA PLUG*

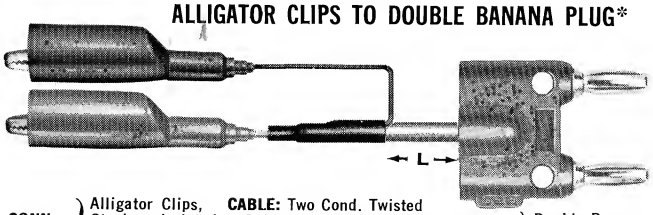

CONN.: 1ST END Alligator Clips, Steel, cad plated Insulators, Vinyl: Black/Red.
CABLE: Two Cond. Twisted Pair, Shielded Mic. or Shielded Coax, RG58C/U.
CONN.: 2ND END Double Banana Plug, on ¾″ centers.

TWO COND. TWISTED PAIR	SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
2BA-AL-18	2BB-AL-18	2BC-AL-18	18″	5.85
2BA-AL-24	2BB-AL-24	2BC-AL-24	24″	5.85
2BA-AL-30	2BB-AL-30	2BC-AL-30	30″	5.85
2BA-AL-36	2BB-AL-36	2BC-AL-36	36″	5.85
2BA-AL-48	2BB-AL-48	2BC-AL-48	48″	6.00
2BA-AL-60	2BB-AL-60	2BC-AL-60	60″	6.15

★ QUANTITY DISC. CODE **B**

MINIGATOR CLIPS TO DOUBLE BANANA PLUG*

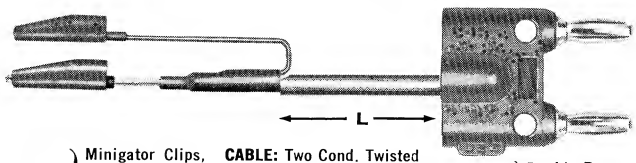

CONN.: 1ST END Minigator Clips, Steel, cad plated Insulators, Vinyl: Black/Red.
CABLE: Two Cond. Twisted pair, Shielded Mic. or Shielded Coax, RG58C/U.
CONN.: 2ND END Double Banana Plug, on ¾″ centers.

TWO COND. TWISTED PAIR	SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
2BA-MG-18	2BB-MG-18	2BC-MG-18	18″	5.85
2BA-MG-24	2BB-MG-24	2BC-MG-24	24″	5.85
2BA-MG-30	2BB-MG-30	2BC-MG-30	30″	5.85
2BA-MG-36	2BB-MG-36	2BC-MG-36	36″	5.85
2BA-MG-48	2BB-MG-48	2BC-MG-48	48″	6.00
2BA-MG-60	2BB-MG-60	2BC-MG-60	60″	6.15

★ QUANTITY DISC. CODE **B**

UHF MALE BOTH ENDS



CONN.: 1ST END PL259, UHF, Male
CABLE: Shielded Mic. or Shielded Coax, RG58C/U.
CONN.: 2ND END PL259, UHF, Male

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
UHF-B-18	UHF-C-18	18″	5.85
UHF-B-24	UHF-C-24	24″	5.85
UHF-B-30	UHF-C-30	30″	5.85
UHF-B-36	UHF-C-36	36″	5.85
UHF-B-48	UHF-C-48	48″	6.00
UHF-B-60	UHF-C-60	60″	6.15

★ QUANTITY DISC. CODE **B**

ALLIGATOR CLIPS TO UHF MALE

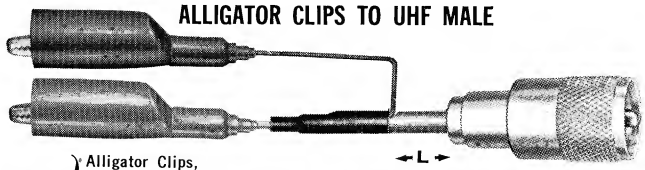

CONN.: 1ST END Alligator Clips, Steel, cad plated Insulators, Vinyl: Black/Red.
CABLE: Shielded Mic. or Shielded Coax, RG58C/U.
CONN.: 2ND END PL259, UHF, Male

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
AL-B-UHF-18	AL-C-UHF-18	18″	5.85
AL-B-UHF-24	AL-C-UHF-24	24″	5.85
AL-B-UHF-30	AL-C-UHF-30	30″	5.85
AL-B-UHF-36	AL-C-UHF-36	36″	5.85
AL-B-UHF-48	AL-C-UHF-48	48″	6.00
AL-B-UHF-60	AL-C-UHF-60	60″	6.15

★ QUANTITY DISC. CODE **B**

MINIGATOR CLIPS TO UHF MALE

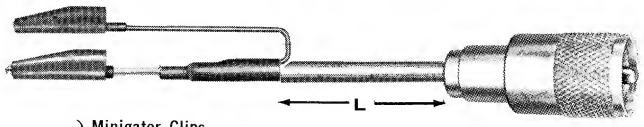

CONN.: 1ST END Minigator Clips, Steel, cad plated Insulators, Vinyl: Black/Red.
CABLE: Shielded Mic. or Shielded Coax, RG58C/U.
CONN.: 2ND END PL259 UHF, Male

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
MG-B-UHF-18	MG-C-UHF-18	18″	5.85
MG-B-UHF-24	MG-C-UHF-24	24″	5.85
MG-B-UHF-30	MG-C-UHF-30	30″	5.85
MG-B-UHF-36	MG-C-UHF-36	36″	5.85
MG-B-UHF-48	MG-C-UHF-48	48″	6.00
MG-B-UHF-60	MG-C-UHF-60	60″	6.15

★ QUANTITY DISC. CODE **B**

UHF MALE TO DOUBLE BANANA PLUG*

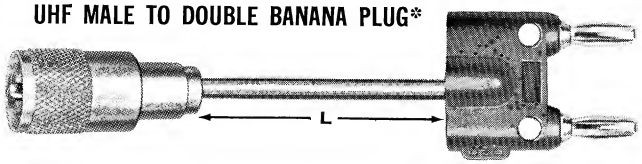

CONN.: 1ST END PL259 UHF, Male
CABLE: Shielded Mic. or Shielded Coax, RG58C/U.
CONN.: 2ND END Double Banana Plug, on ¾″ centers.

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
2BB-UHF-18	2BC-UHF-18	18″	5.85
2BB-UHF-24	2BC-UHF-24	24″	5.85
2BB-UHF-30	2BC-UHF-30	30″	5.85
2BB-UHF-36	2BC-UHF-36	36″	5.85
2BB-UHF-48	2BC-UHF-48	48″	6.00
2BB-UHF-60	2BC-UHF-60	60″	6.15

★ QUANTITY DISC. CODE **B**

*NOTE: Molded double plug matches color of cable. Two cond. Twisted pair, GRAY. Shielded mic. cable, GRAY. Coaxial RG58C/U cable, BLACK.

1. Other CABLE COLORS available to order on the Two Cond. Twisted Pair and Shielded Mic. cable models, with plug to match. COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.
2. Other lengths and cable types available to order.

★ Various lengths may be aggregated for best quantity price.

UHF MALE TO SHIELDED DOUBLE PLUG*

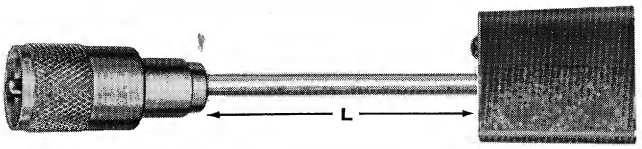

CONN.: 1ST END PL259, Male, UHF **CABLE:** Shielded Mic. or Shielded Coax, RG58C/U. **CONN.: 2ND END** Shielded Double Plug, on ¾" centers. Black anodized aluminum.

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1556-B-18	1556-C-18	18"	6.85
1556-B-24	1556-C-24	24"	6.85
1556-B-36	1556-C-36	36"	6.85
1556-B-48	1556-C-48	48"	7.00
1556-B-60	1556-C-60	60"	7.15

★ QUANTITY DISC. CODE **B**

SERIES "N" MALE BOTH ENDS

CONN.: 1ST END UG21E/U "N" Male **CABLE:** Coax, RG213/U **CONN.: 2ND END** UG21E/U "N" Male

CABLE DESCRIPTION Shielded Coax. Polyethylene Insulation. Vinyl jacket, Black. Nom. Cap. 29.5 pf/ft. Nom. Imp. 50 ohms. Nom. O.D. .405".

MODEL	LENGTH	NET
1658-S-18	18"	10.85
1658-S-24	24"	10.85
1658-S-36	36"	10.85
1658-S-48	48"	11.00
1658-S-60	60"	11.15

★ QUANTITY DISC. CODE **B**

NEW

GR-874 TO GR-874

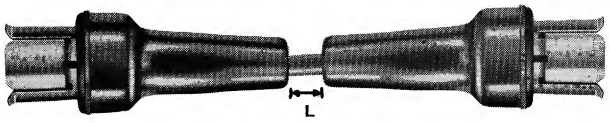

CONN: 1st END GR-874 **CABLE:** Shielded coax., RG58C/U **CONN: 2nd END** GR-874

CABLE DESCRIPTION: Shielded coax., RG58C/U, Polyethylene Insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.

MODEL	LENGTH	NET
2316-C-24	24"	16.85
2316-C-36	36"	16.85
2316-C-48	48"	17.00
2316-C-60	60"	17.15

★ QUANTITY DISC. CODE **B**

NEW

SERIES "N" MALE TO GR-874

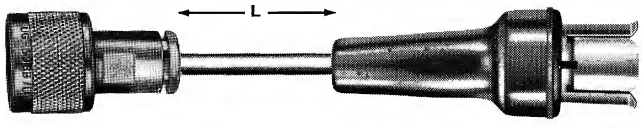

CONN: 1st END UG536B/U "N" Male **CABLE:** Shielded Coax., RG58C/U **CONN: 2nd END** GR-874

CABLE DESCRIPTION: Shielded coax., RG58C/U, Polyethylene Insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.

MODEL	LENGTH	NET
2438-C-24	24"	10.85
2438-C-36	36"	10.85
2438-C-48	48"	11.00
2438-C-60	60"	11.15

★ QUANTITY DISC. CODE **B**

RIGHT ANGLE SHIELDED DOUBLE PLUG BOTH ENDS

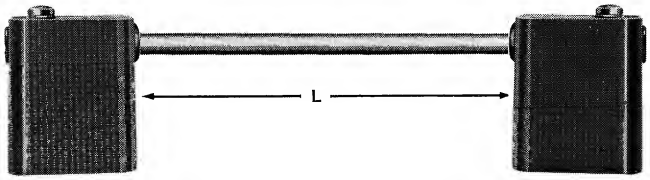

CONN: 1st END Right Angle Shielded double plug on ¾" centers. Black anodized aluminum shield. **CABLE:** Shielded coax. RG58C/U. **CONN: 2nd END** Right Angle Shielded double plug on ¾" centers. Black anodized aluminum shield.

CABLE DESCRIPTION: Shielded coax., RG58C/U, polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.

MODEL	LENGTH	NET
2204-C-24	24"	7.85
2204-C-36	36"	7.85
2204-C-48	48"	8.00
2204-C-60	60"	8.15

★ QUANTITY DISC. CODE **B**

SINGLE BANANA PLUGS BOTH ENDS

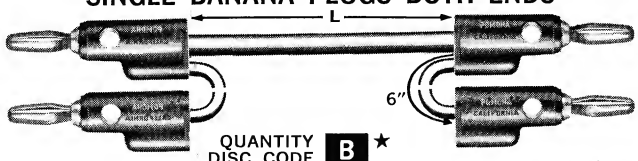

QUANTITY DISC. CODE **B** ★

CONN: 1st END Single Banana Plugs Colors: Inner Conductor plug, Red. Ground Plug, Black. **CABLE:** Shielded Coax., RG122/U **CONN: 2nd END** Single Banana Plugs. Colors: Inner Conductor Plug, Red. Ground Plug, Black.

CABLE DESCRIPTION: Shielded coax., RG122/U polyethylene insulation. Vinyl jacket, .160" O.D., Nom. Cap. 29.5 pf/ft.

MODEL	LENGTH	NET
2239-R-24	24"	4.85
2239-R-36	36"	4.85
2239-R-48	48"	5.00
2239-R-60	60"	5.15

NEW

TWO CONDUCTOR—SHIELDED TO KELVIN CLIP

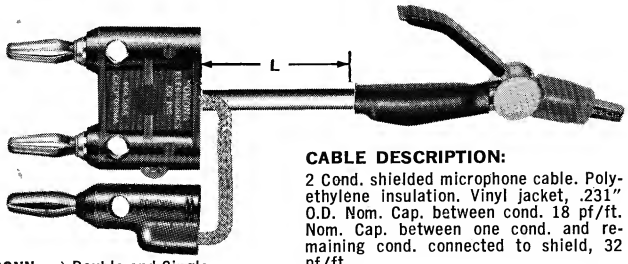

CONN: 1st END Double and Single Banana Plug.

CABLE: 2 Cond. Shielded Microphone

CONN: 2nd END Kelvin Clip

CABLE DESCRIPTION: 2 Cond. shielded microphone cable. Polyethylene Insulation. Vinyl jacket, .231" O.D. Nom. Cap. between cond. 18 pf/ft. Nom. Cap. between one cond. and remaining cond. connected to shield, 32 pf/ft.

COLORS: Cable and double plug, GRAY. Single ground plug, GREEN.

★ QUANTITY DISC. CODE	MODEL	LENGTH	NET
B	2476-J-24	24"	16.85
	2476-J-36	36"	16.85

NEW

ALLIGATOR CLIPS BOTH ENDS

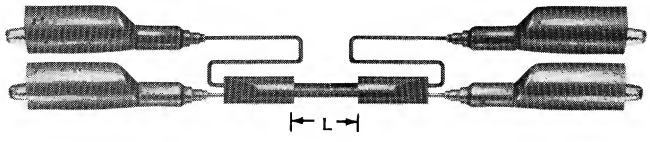

CONN: 1st END Alligator Clips, Steel, cad plated Insulators, Vinyl: Black/Red. **CABLE:** Shielded Coax., RG58C/U **CONN: 2nd END** Alligator Clips, Steel, cad plated Insulators, Vinyl: Black/Red.

CABLE DESCRIPTION: Shielded coax., RG58C/U, Polyethylene Insulation Vinyl jacket, .195" O.D. Nom. Cap. 28.5 pf/ft.

MODEL	LENGTH	NET
1152-C-12	12"	5.85
1152-C-24	24"	5.85
1152-C-36	36"	5.85
1152-C-48	48"	6.00
1152-C-60	60"	6.15

★ QUANTITY DISC. CODE **B**

*NOTE: Molded double plug matches color of cable. Two cond. Twisted pair, GRAY. Shielded mic. cable, GRAY. Coaxial RG58C/U cable, BLACK.

1. Other CABLE COLORS available to order on the Two Cond. Twisted Pair and Shielded Mic. cable models, with plug to match. COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.
2. Other lengths and cable types available to order.

★Various lengths may be aggregated for best quantity price.

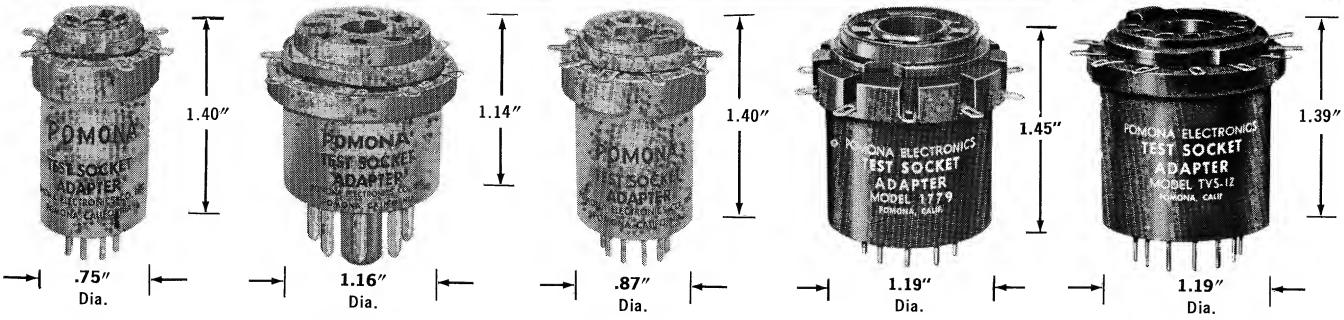

MODEL TVS-7
7 PIN MIN.
QUANTITY DISC. CODE **C**
NET 1.65

MODEL TVS-8
8 PIN OCTAL
QUANTITY DISC. CODE **C**
NET 1.75

MODEL TVS-9
9 PIN MIN.
QUANTITY DISC. CODE **C**
NET 1.85

MODEL 1779
9 PIN NOVAR
QUANTITY DISC. CODE **C**
NET 2.25

MODEL TVS-12
12 PIN COMPACTRON
QUANTITY DISC. CODE **C**
NET 2.55

Pomona Test Socket Tube Adapters are ideal for making measurements of voltage, resistance, audio and video without tracing complicated circuits from the bottom of the chassis. They feature: Extended test tabs for easy use with either alligator clips or test prods; Low loss MICA-FILLED molded phenolic construction per MIL-M-14, MFE. Power factor less than 0.010 at 10 Mc; high insulation resistance, the I.R. exceeds 500,000 megohms at 40% R.H., at 24°C; Distributed capacity, inter-element approximately 1 micro-micro farad; high voltage operation, voltage breakdown elements exceeds 1700 volts AC or DC Model TVS-12 and 1779 molded of electrical grade Black phenolic.

TVS-789 KIT SET OF THREE 5.25
(TVS-7, TVS-8, TVS-9)

TUNER TV TEST SOCKET TUBE ADAPTERS

FOR USE WITH TUNERS HAVING CAPTIVE OR TELESCOPING TUBE SHIELDS

IT'S TALL • IT'S SLIM • IT FITS

- Extra height—exact fit—clears shields
- Ready access to socket connections
- Exposed operation saves time

A MUST for every modern TV Service Shop

The 7-, 9- or 10-HIGH adapter rises above the shields and places testing in the open. Shields or tuner covers do not have to be removed. All construction is the highest quality. Interelement distributed capacity is approximately 1.5 micro-micro farad. Voltage breakdown elements exceed 1800 V. AC or DC. The insulation resistance exceeds 5 x 10^5 megohms at 40% R.H. at 24°C.

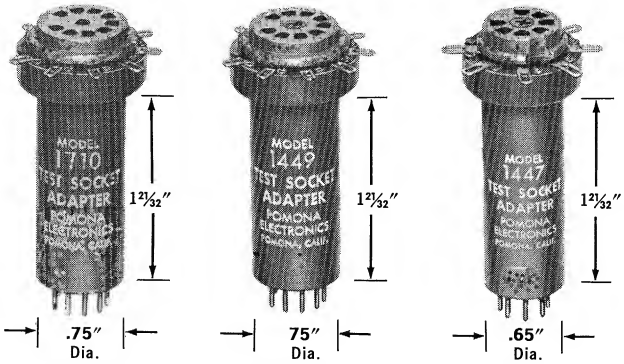

MODEL 1710
10 HIGH
10 pin, Miniature
QUANTITY DISC. CODE **C**
NET 2.25

MODEL 1449
9 HIGH
9 pin, Miniature
QUANTITY DISC. CODE **C**
NET 1.95

MODEL 1447
7 HIGH
7 pin, Miniature
QUANTITY DISC. CODE **C**
NET 1.85

SURFACE MOUNTED BREADBOARD SOCKETS

IDEAL FOR ELECTRONIC AND EXPERIMENTAL USE

Surface Mounted Breadboard Sockets are used for experimental circuit design, portable and enclosed units, plug-in and packaged assemblies. They feature: An insulated base to prevent connections from shorting to chassis; Eliminates double chassis design; Circuits may be wired in an enclosed unit; The base connections are numbered for easy identification; Grade-A phosphor bronze spring contacts; Standard center to center mounting holes; For ease of installation the 7 and 9 Pin Miniatures may be mounted either in the center or on the sides, the 8 Pin Octal is mounted on the sides; Small mounting holes permit the re-use of experimental chassis.



MODEL XS-7
7 PIN MINIATURE
QUANTITY DISC. CODE **C** **NET .59**



MODEL XS-8
8 PIN OCTAL
QUANTITY DISC. CODE **C** **NET .75**



MODEL XS-9
9 PIN MINIATURE
QUANTITY DISC. CODE **C** **NET .69**

POMONA ELECTRONICS SOCKET SAVERS

The Socket Saver® is designed to be installed on tube checkers and other electronic equipment to prevent wear and tear of sockets on original equipment. They are easy to install and remove. This eliminates the necessity of replacing and rewiring sockets on original equipment. Built of quality materials. BERYLLIUM COPPER LONG LIFE CONTACTS to give maximum service.

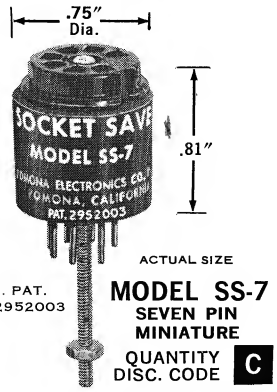

U.S. PAT. NO. 2952003

MODEL SS-7
SEVEN PIN MINIATURE
QUANTITY DISC. CODE **C**
NET 1.75

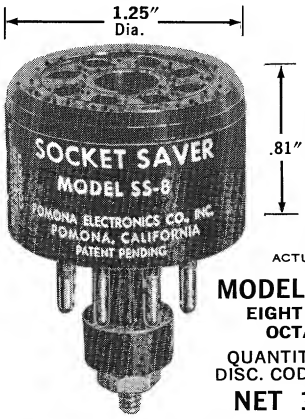

MODEL SS-8
EIGHT PIN OCTAL
QUANTITY DISC. CODE **C**
NET 1.75

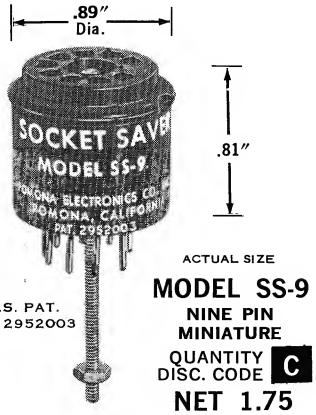

U.S. PAT. NO. 2952003

MODEL SS-9
NINE PIN MINIATURE
QUANTITY DISC. CODE **C**
NET 1.75

MODEL SS-789 KIT SET OF THREE 5.25
(SS-7, SS-8, SS-9)

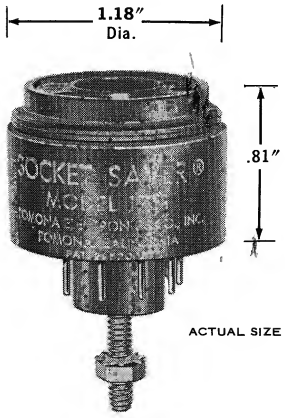

MODEL 1751
9 PIN NOVAR
QUANTITY DISC. CODE **C** **NET 1.95**

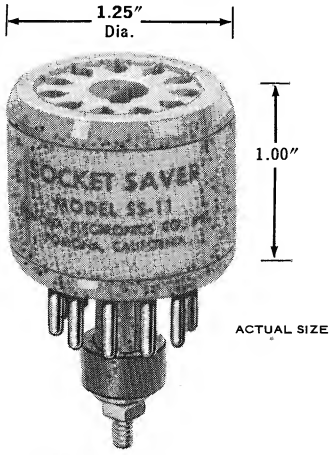

MODEL SS-11
11 PIN OCTAL STYLE
QUANTITY DISC. CODE **C** **NET 1.95**

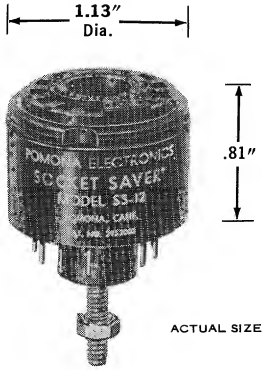

MODEL SS-12
12 PIN COMPACTRON
QUANTITY DISC. CODE **C** **NET 2.25**

MINIATURIZED SOCKET SAVERS®

For use in applications where vertical height is restricted. Contacts made of beryllium copper, heat treated. Models 1847 and 1849 closed entry receptacles, contact and pin one piece formed beryllium copper, molded of black phenolic electrical grade.



MODEL 1847
7 PIN MINIATURE
QUANTITY DISC. CODE **C** **NET 1.95**

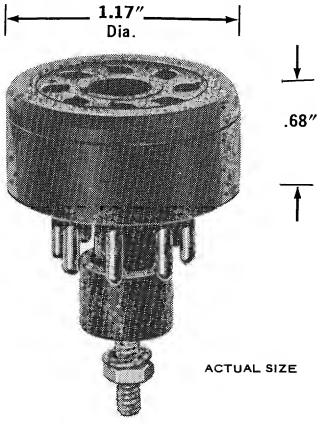

MODEL 1848
8 PIN OCTAL
QUANTITY DISC. CODE **C** **NET 1.95**



MODEL 1849
9 PIN MINIATURE
QUANTITY DISC. CODE **C** **NET 1.95**

POMONA ELECTRONICS

CATHODE RAY TUBE TEST ADAPTERS

■ POMONA Test Socket Adapters are ideal for making measurements of voltage, resistance, and video from the base of the picture tube. The test socket adapter is inserted between the CR Tube base and its socket. This completes the circuit and makes all connections readily accessible. Measurements can be made without tracing circuit wiring to test points below the chassis, thereby saving valuable time and increasing efficiency in trouble shooting.



MODEL TVS-1

DUO DECAL
For Television
picture tubes

NET 1.95
QUANTITY DISC. CODE **D**



MODEL TVS-2

NEO-DIHEPTAL
For color Television
picture tubes

NET 7.45
QUANTITY DISC. CODE **D**



MODEL TVS-3

EIGHTAR (.040 PINS)
For 110° Television
picture tubes

NET 2.55
QUANTITY DISC. CODE **D**



MODEL TVS-4

7 PIN (.093 PINS)
For 110° Television
picture tubes

NET 1.95
QUANTITY DISC. CODE **D**

TUBE SOCKET CONVERSION ADAPTERS

110° CRT SOCKET ADAPTER TO DUO DECAL BASE. **FOR TESTING NEW NARROW-NECK 110° TUBES.**

MODEL 110-E
Similar to 110-G, except 8KP Basing, tests 23EP4 etc.
NET 1.55 QUANTITY DISC. CODE **D**

Modernize your present test equipment with these simple adapters. Just plug in adapter to convert to 110° socket. Used for testing, ageing, and lifetesting, etc.



MODEL 110-G

Eightar socket end, 8JS Basing, accepts pins with .040 dia., (.600 pin circle dia.). Wired to test 110° series similar to 17DLP4, 21ESP4, 23KP4, etc. Plug end wired to Duo Decal 12L Basing.

NET 1.55
QUANTITY DISC. CODE **D**



MODEL 110-P

Eightar socket end, 8JK Basing, accepts pins with .040 dia., (.600 pin circle dia.). Wired to test 110° Semi-Flat S-F series 17DAP4/SF17, 21EAP4/SF21, etc. Plug end wired to Duo Decal 12L Basing.

NET 1.55
QUANTITY DISC. CODE **D**



MODEL 110-R

Eightar socket end, 8HR Basing, accepts pins with .040 dia., (.600 pin circle dia.). Wired to test 110° series similar to 17BZP4, 21CEP4, 23CP4, etc. Plug end wired to Duo Decal 12L Basing.

NET 1.55
QUANTITY DISC. CODE **D**

MODEL 110-S

Socket end, button base, 7FA Basing, accepts 7 pins .093 dia., (.820 pin circle dia.). Wired to test 110° series similar to 17BVP4, 21CSP4, 23JP4, etc. Plug end wired to Duo Decal 12L Basing.

NET 1.55
QUANTITY DISC. CODE **D**

MODEL 110-RS

Eightar socket end, 8HR Basing, accept pins with .040 dia., (.600 pin circle dia.). Wired to test 110° series similar to 17BZP4, 21CEP4, 23CP4, etc. Plug end, 7 pin Button, 7FA Basing.

NET 1.95
QUAN. DISC. CODE **D**

SYLVANIA TO RCA 110° CRT—ADAPTER



Socket End: Sylvania Type 7FA Basing.
Plug End: RCA Type 8HR Basing.

MODEL 110-SYR **NET 2.25**

QUANTITY DISC. CODE **D**

COLOR—TUBE SOCKET CONVERSION ADAPTER



This single adapter will allow you to test both the new Motorola and RCA color tubes with your present test equipment. Provision for accepting bases equipped with spark gaps.

Socket End: Miniature Diheptal Socket, 14BE Basing.

Plug End: Neo-Diheptal Base, 14AL/AU Basing.

QUANTITY DISC. CODE **D** **MODEL 2276** **NET 5.95**

COLOR—TEST ADAPTER MINIATURE DIHEPTAL

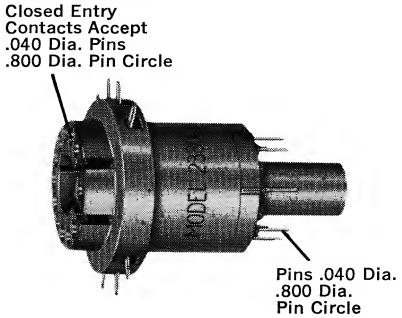

MINIATURE DIHEPTAL
For Color Television
Picture Tubes
Provision for spark gaps.

MODEL 2380

QUANTITY DISC. CODE **D** **NET 4.95**

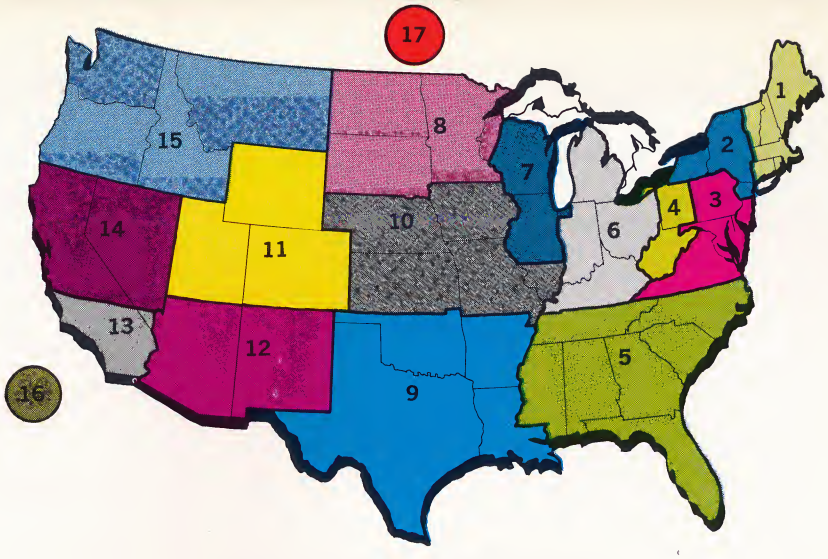

SALES REPRESENTATIVES

Listed below are the names of our Factory Representatives who have contributed greatly to the growth of our organization. The men in your area are always ready to confer with you and assist you regarding Pomona Electronics products.

1 Robert S. Reiss Associates
70 Jessie Drive
West Haven, Connecticut 06516
(203) 933-8542
Territory: Maine, Vermont, New Hampshire, Massachusetts, Connecticut, Rhode Island

Robert S. Reiss Associates
(Branch Office)
Al Appell
199 East Foxboro St.
Sharon, Massachusetts
(617) 784-3439

2 Jack Weber
2700 Henry Hudson Pkwy.
New York, New York 10463
(212) 546-8306
Territory: New York State & Northern New Jersey

3 David S. Linz
238 Shelmire Street
Philadelphia, Penn. 19111
(215) 379-0734
Territory: So. New Jersey, E. Pennsylvania, Delaware, Maryland, Washington, D.C.

4 F. P. Yarussi Company
312 Rockfield Road
Pittsburgh, Pennsylvania 15216
(412) 221-4676
Territory: Western Pennsylvania, West Virginia

5 V. Avis McCorvey Company
P. O. Box 606
Decatur, Georgia
(404) 636-2502
Territory: Alabama, Florida, Georgia, North Carolina, South Carolina, Tennessee, Miss.

V. Avis McCorvey Company
(Branch Office)
Frank Alexander
2248 Third Street, N.W.
Birmingham 15, Alabama
(205) 836-5769

V. Avis McCorvey Company
(Branch Office)
James D. Burnett
P. O. Box 128
Lutz, Florida
(813) 949-1479

6 Perry Lohse & Company
529 Richmond Road
Cleveland 24, Ohio
(216) 381-7788
Territory: Ohio, Michigan, Kentucky and Indiana (Except counties of Lake, Porter, and La Porte)

Perry Lohse & Company
(Branch Office)
The C. A. Geer Co.
221 Graceland St., N.E.
Grand Rapids, Michigan 49505
(616) 363-0905

Perry Lohse & Company
(Branch Office)
Ed Howell
3443 North DeQuincy Street
Indianapolis, Indiana 46218
(317) 546-5228

7 William M. Linz Associates, Inc.
6328 North Cicero Avenue
Chicago, Illinois 60646
(312) 685-6060
Territory: Illinois (south to and including Jacksonville, Springfield, Decatur, Moline and Rock Island.) Wisconsin (north to Green Bay and Marinette). Counties of Lake, La Porte and Porter in Indiana.

8 Northern States Sales Co.
1109 W. 78½ St.
Minneapolis, Minnesota 55420
(612) 866-3468
Territory: Minnesota, North Dakota, South Dakota, and Western Wisconsin

9 Techno Associates
P. O. Box 20544
Dallas, Texas 75220
(214) 357-9213
Territory: Texas, Arkansas, Louisiana, Oklahoma

10 Clemenson-Larrabee Co.
3709-A Summit Street
Kansas City, Missouri 64111
(816) 931-0657
Territory: Missouri, Kansas, Nebraska, Iowa, and cities of Belleville and Benton in Illinois

Clemenson-Larrabee Co.
(Branch Office)
Berk Fontaine
2725 Beloit Drive
Bridgeton, Missouri 63042
(314) 739-6857

11 AES, Inc.
1559 Chester Street
Aurora, Colorado 80010
(303) 366-0208
Territory: Colorado, Utah, Wyoming.

12 Harry A. Moore Sales Co.
P. O. Box 7245
Phoenix, Arizona 85011
(602) 274-0060
Territory: Arizona, New Mexico and El Paso, Texas

13 Paul Nurches—Indus. OEM Sales
2396 East Foothill Blvd.
Pasadena, California
(213) 681-8957
Territory: Southern California, Southern Nevada and City of Las Vegas

Al J. Rissi Sales Co.
(Distributor Sales)
1017 East Las Tunas Drive
San Gabriel, California 91776
(213) 283-7614 (213) 286-1476
Territory: So. Calif., So. Nevada, City of Las Vegas

14 Paul Nurches—Indus. OEM Sales
(Branch Office)
Chuck Boyenga
941 Charleston Road
Palo Alto, California
(415) 326-7842
Territory: No. Calif., No. Nevada, except for City of Las Vegas, and southern tip.

Belchamber & French Co.
(Distributor Sales)
7605 Freedom Blvd.
Aptos, California 95003
(408) 688-3281
Territory: Northern California and No. Nevada except City of Las Vegas

15 Fred H. Haight Company
3212 Eastlake Avenue
Seattle, Washington 98102
(206) 322-1818
Territory: Washington, Oregon, Idaho, Montana, Alaska, and British Columbia in Canada

16 Intercontinental Aviation Services, Inc.
P.O. Box 1705
Beverly Hills, California
(213) 274-7578
Territory: Export

17 Electronetic Systems Ltd.
62 Alness Street
Downsview, Ontario, Canada
(416) 636-3673
Territory: Ontario, Manitoba, Saskatchewan, Alberta

Electronetic Systems Ltd.
(Branch Office)
Ben L. Reitelman
6420 Victoria Ave., Suite 17
Montreal 26, Quebec, Canada
(514) 737-2744
Territory: Quebec, Ottawa, Maritimes

POMONA ELECTRONICS CO. INC.

1500 EAST NINTH ST. • POMONA, CALIFORNIA
TELEPHONE: AREA CODE 714-623-3463

EIA MEMBER
SEE OUR SPECIFICATIONS IN VSMF THE MICROFILM CATALOG FILE

Printed in U.S.A.

INDUSTRIAL QUANTITY PRICES NO. IQP–11-66

Use with General Catalog 11-66 (Effective March 1, 1966
Replaces IQP—10-65 of April 1, 1965) • Prices subject to change without notice.

POMONA ELECTRONICS CO. INC.
1500 East Ninth Street • Pomona, California 91769 • Telephone: (714) 623-3463

SEE OUR SPECIFICATIONS IN VSMF MICROFILM CATALOG FILE

eem File System | Sec. 2100
electronic engineers master

POMONA ELECTRONICS CO. INC. POMONA, CALIFORNIA

ELECTRONIC TEST ACCESSORIES
Industrial Quantity Prices

QUANTITY PRICE DISCOUNT SCHEDULE

NOTE: Where star (*) is shown in general catalog, various lengths may be aggregated for best quantity price.

QUANTITY DISCOUNT CODES

NET PRICES	A				B				C			D
	1-24	25-49	50-99	100-249	1-9	10-24	25-49	50-99	1-49	50-99	100-249	
.15	.15	.14	.13	.11								
.25	.25	.23	.21	.18								
.35	.35	.32	.30	.25								
.50	.50	.45	.43	.35								
.59									.59	.54	.50	
.69									.69	.63	.59	
.75	.75	.68	.64	.53					.75	.68	.64	
.80	.80	.73	.69	.58								
.85	.85	.77	.72	.60								
.90	.90	.82	.77	.65								
.95	.95	.86	.81	.67								
1.00	1.00	.91	.86	.72								
1.05	1.05	.96	.91	.77								
1.10	1.10	1.00	.95	.80								
1.50	1.50	1.35	1.28	1.05								
1.55	1.55	1.40	1.33	1.10								1.55
1.60	1.60	1.45	1.38	1.15								
1.65									1.65	1.40	1.35	
1.75	1.75	1.58	1.50	1.23					1.75	1.50	1.40	
1.80	1.80	1.63	1.55	1.28								
1.85	1.85	1.68	1.60	1.33					1.85	1.57	1.52	
1.90	1.90	1.71	1.62	1.35								
1.95	1.95	1.76	1.67	1.40					1.95	1.66	1.56	1.95
2.25	2.25	2.02	1.91	1.57					2.25	1.91	1.80	2.25
2.50	2.50	2.25	2.12	1.75								
2.55	2.55	2.30	2.17	1.80					2.55	2.29	2.17	2.55
2.60	2.60	2.35	2.22	1.85								
2.75	2.75	2.48	2.34	1.93								
2.85	2.85	2.57	2.42	2.00								
2.95	2.95	2.65	2.51	2.07								
3.25	3.25	2.93	2.76	2.28								
3.45	3.45	3.10	2.93	2.42								
3.75	3.75	3.38	3.20	2.63								
3.85	3.85	3.47	3.27	2.70	3.85	3.47	3.27	2.70				
4.00					4.00	3.62	3.42	2.85				
4.15					4.15	3.77	3.57	3.00				
4.85	4.85	4.37	4.13	3.40	4.85	4.37	4.13	3.40				
4.95												4.95
5.00					5.00	4.52	4.28	3.55				

To find the quantity discount price for a specific model, simply note the net price, and quantity discount schedule code letter listed for the item in the catalog. Then, referring to the industrial price list, locate the net price in the left-hand column, and the code letter in one of the right-hand columns. This will give you the quantity discount price for that particular item. TYPICAL CATALOG LISTING ➔

DOUBLE BANANA PLUG



Double banana plug on ¾" centers; set screws secure leads; simplifies cable construction or component mounting; banana jacks permit top Stack-Up for multiple connections.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL MDP (Specify Color) QUANTITY DISC. CODE **A** **NET .75**

NET PRICES	A				B				C			D
	1-24	25-49	50-99	100-249	1-9	10-24	25-49	50-99	1-49	50-99	100-249	
5.15					5.15	4.67	4.43	3.70				
5.25									5.25	4.47	4.20	
5.85	5.85	5.27	4.97	4.10	5.85	5.27	4.97	4.10				
5.95												5.95
6.00					6.00	5.42	5.12	4.25				
6.15					6.15	5.57	5.27	4.40				
6.85	6.85	6.17	5.84	4.80	6.85	6.17	5.84	4.80				
7.00					7.00	6.32	5.99	4.95				
7.15					7.15	6.47	6.14	5.10				
7.45												7.45
7.50					7.50	6.75	6.38	5.25				
7.65					7.65	6.90	6.53	5.40				
7.80					7.80	7.05	6.68	5.55				
7.85	7.85	7.05	6.67	5.48	7.85	7.05	6.67	5.48				
8.00	8.00	7.20	6.82	5.63	8.00	7.20	6.82	5.63				
8.10					8.10	7.30	6.92	5.73				
8.15					8.15	7.35	6.97	5.78				
8.35					8.35	7.55	7.17	5.98				
8.95	8.95	8.06	7.60	6.26								
9.50	9.50	8.55	8.07	6.65	9.50	8.55	8.07	6.65				
9.65					9.65	8.70	8.22	6.80				
9.85	9.85	8.88	8.38	6.90	9.85	8.88	8.38	6.90				
9.95												9.95
10.00					10.00	9.03	8.53	7.05				
10.85	10.85	9.75	9.22	7.58	10.85	9.75	9.22	7.58				
11.00					11.00	9.90	9.37	7.73				
11.15					11.15	10.05	9.52	7.88				
11.75	11.75	10.58	9.99	8.23								
16.85					16.85	15.17	14.33	11.80				
17.00					17.00	15.32	14.48	11.95				
17.15					17.15	15.47	14.63	12.10				
24.75	24.75	22.28	21.04	17.33								

FREIGHT: F.O.B., Pomona, California

TERMS: 1% 10 days. Net 30 days from Invoice Date, upon approval of credit.

NOTE: Where star (★) is shown in general catalog, various lengths may be aggregated for best quantity price.

Items prefixed with "2BA and 2BB" Series in catalog are also available in 36" lengths at no extra cost as a Standard Item with colored cable and molded matching plugs: Black, Blue, Brown, Gray, Green, Orange, Red, Violet, White & Yellow. Quantities may be aggregated within bracket for lowest price.

b. Items prefixed with "2BA and 2BB" Series in catalog also available in lengths other than 36" in color, to order. Minimum order, 25 pieces per Model, per Color. On orders of less than 25 pieces, there will be a $10 color set-up charge per color, per model. Lengths may be assorted. Quantities may be aggregated within bracket, within each Color only. Lengths may be assorted.

c. Items prefixed with "2BC" Series in catalog, cable black only. Colored Molded Plugs available to order. Minimum order—25 pieces per Model, per Color. Quantities may be aggregated within bracket within each Color only. Lengths may be assorted.

d. Lengths and cable types other than those specified available upon request.

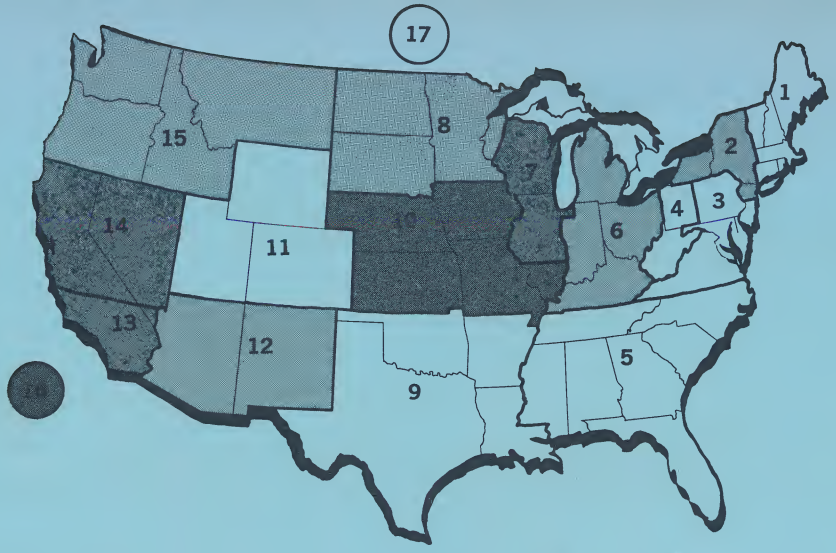

SALES REPRESENTATIVES

Listed below are the names of our Factory Representatives who have contributed greatly to the growth of our organization. The men in your area are always ready to confer with you and assist you regarding Pomona Electronics products.

1 Robert S. Reiss Associates
70 Jessie Drive
West Haven, Connecticut 06516
(203) 933-8542
Territory: Maine, Vermont, New Hampshire, Massachusetts, Connecticut, Rhode Island

Robert S. Reiss Associates
(Branch Office)
Al Appell
199 East Foxboro St.
Sharon, Massachusetts
(617) 784-3439

2 Jack Weber
2700 Henry Hudson Pkwy.
New York, New York 10463
(212) 546-8306
Territory: New York State & Northern New Jersey

3 David S. Linz
238 Shelmire Street
Philadelphia, Penn. 19111
(215) 379-0734
Territory: So. New Jersey, E. Pennsylvania, Delaware, Maryland, Washington, D.C.

4 F. P. Yarussi Company
312 Rockfield Road
Pittsburgh, Pennsylvania 15216
(412) 221-4676
Territory: Western Pennsylvania, West Virginia

5 V. Avis McCorvey Company
P. O. Box 606
Decatur, Georgia
(404) 636-2502
Territory: Alabama, Florida, Georgia, North Carolina, South Carolina, Tennessee, Miss.

V. Avis McCorvey Company
(Branch Office)
Frank Alexander
2248 Third Street, N.W.
Birmingham 15, Alabama
(205) 836-5769

V. Avis McCorvey Company
(Branch Office)
James D. Burnett
P. O. Box 128
Lutz, Florida
(813) 949-1479

6 Perry Lohse & Company
529 Richmond Road
Cleveland 24, Ohio
(216) 381-7788
Territory: Ohio, Michigan, Kentucky and Indiana (Except counties of Lake, Porter, and La Porte)

Perry Lohse & Company
(Branch Office)
The C. A. Geer Co.
221 Graceland St., N.E.
Grand Rapids, Michigan 49505
(616) 363-0905

Perry Lohse & Company
(Branch Office)
Ed Howell
3443 North DeQuincy Street
Indianapolis, Indiana 46218
(317) 546-5228

7 William M. Linz Associates, Inc.
6328 North Cicero Avenue
Chicago, Illinois 60646
(312) 685-6060
Territory: Illinois (south to and including Jacksonville, Springfield, Decatur, Moline and Rock Island.) Wisconsin (north to Green Bay and Marinette). Counties of Lake, La Porte and Porter in Indiana.

8 Northern States Sales Co.
1109 W. 78½ St.
Minneapolis, Minnesota 55420
(612) 866-3468
Territory: Minnesota, North Dakota, South Dakota, and Western Wisconsin

9 Techno Associates
P. O. Box 20544
Dallas, Texas 75220
(214) 357-9213
Territory: Texas, Arkansas, Louisiana, Oklahoma

10 Clemenson-Larrabee Co.
3709-A Summit Street
Kansas City, Missouri 64111
(816) 931-0657
Territory: Missouri, Kansas, Nebraska, Iowa, and cities of Belleville and Benton in Illinois

Clemenson-Larrabee Co.
(Branch Office)
Berk Fontaine
2725 Beloit Drive
Bridgeton, Missouri 63042
(314) 739-6857

11 AES, Inc.
1559 Chester Street
Aurora, Colorado 80010
(303) 366-0208
Territory: Colorado, Utah, Wyoming.

12 Harry A. Moore Sales Co.
P. O. Box 7245
Phoenix, Arizona 85011
(602) 274-0060
Territory: Arizona, New Mexico and El Paso, Texas

13 Paul Nurches—Indus. OEM Sales
2396 East Foothill Blvd.
Pasadena, California
(213) 681-8957
Territory: Southern California, Southern Nevada and City of Las Vegas

Al J. Rissi Sales Co.
(Distributor Sales)
1017 East Las Tunas Drive
San Gabriel, California 91776
(213) 283-7614 (213) 286-1476
Territory: So. Calif., So. Nevada, City of Las Vegas

14 Paul Nurches—Indus. OEM Sales
(Branch Office)
Chuck Boyenga
941 Charleston Road
Palo Alto, California
(415) 326-7842
Territory: No. Calif., No. Nevada, except for City of Las Vegas, and southern tip.

Belchamber & French Co.
(Distributor Sales)
7605 Freedom Blvd.
Aptos, California 95003
(408) 688-3281
Territory: Northern California and No. Nevada except City of Las Vegas

15 Fred H. Haight Company
3212 Eastlake Avenue
Seattle, Washington 98102
(206) 322-1818
Territory: Washington, Oregon, Idaho, Montana, Alaska, and British Columbia in Canada

16 Intercontinental Aviation Services, Inc.
P.O. Box 1705
Beverly Hills, California
(213) 274-7578
Territory: Export

17 Electronetic Systems Ltd.
62 Alness Street
Downsview, Ontario, Canada
(416) 636-3673
Territory: Ontario, Manitoba, Saskatchewan, Alberta

Electronetic Systems Ltd.
(Branch Office)
Ben L. Reitelman
6420 Victoria Ave., Suite 17
Montreal 26, Quebec, Canada
(514) 737-2744
Territory: Quebec, Ottawa, Maritimes

POMONA ELECTRONICS CO. INC.
1500 EAST NINTH ST. • POMONA, CALIFORNIA
TELEPHONE: AREA CODE 714-623-3463

EIA MEMBER
SEE OUR SPECIFICATIONS IN VSMF THE MICROFILM CATALOG FILE

Printed in U.S.A.